



WAAS CH 63122 W35A	APP CRS 346°	Rwy Ldg TDZE Apt Elev	6932 311 321
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 35

EASTERWOOD FLD (CLL)

RNP APCH - GPS.	MALSRL 	MISSED APPROACH: Climb to 2100 direct ZAKBU and hold.
		
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C or above 54°C. For inop ALS, increase LPV Cat E visibility to ¾ SM, increase LNAV/VNAV all Cats visibility to ¾ SM, increase LNAV Cat E visibility to 1 ¾ SM.		

ATIS 126.85	HOUSTON APP CON 134.3 360.85	EASTERWOOD TOWER ★ 118.5 (CTAF) 0 284.7	GND CON 128.7 284.7	UNICOM 122.95
-----------------------	--	---	-------------------------------	-------------------------

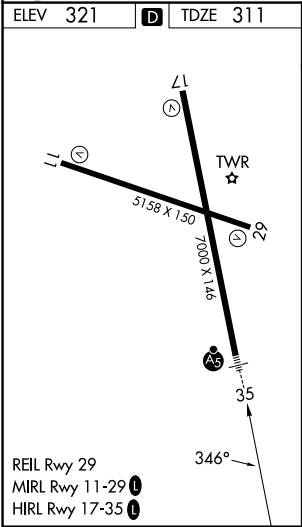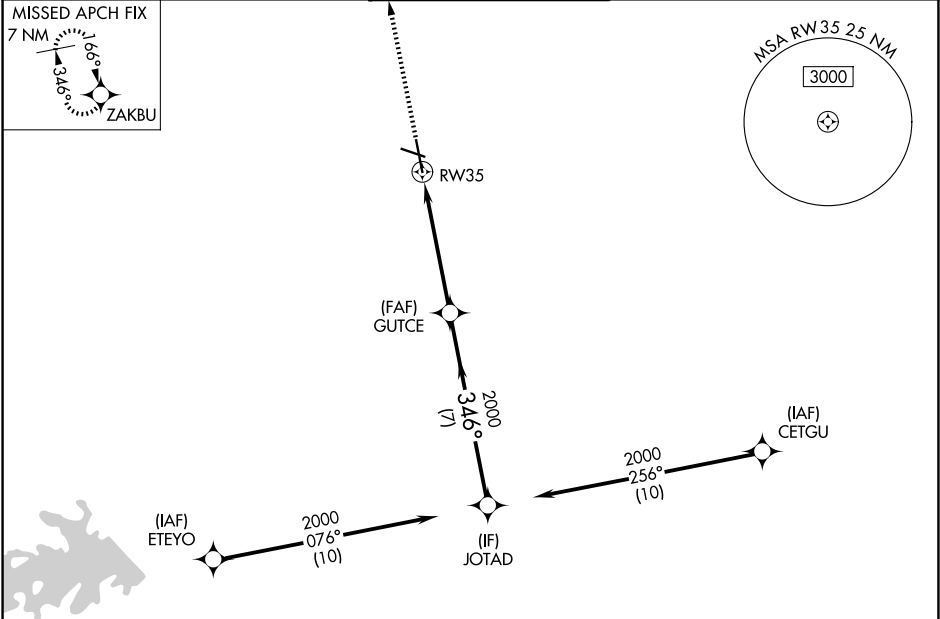

2100



ZAKBU



GUTCE

2000

JOTAD

2000

1.3 NM to RW35



346°



2000



RW35



1.3 NM



3.9 NM



7 NM



GP 3.00°

TCH 55

CATEGORY	A	B	C	D	E
LPV DA	511-1/2 200 (200-1/2)				
LNAV/VNAV DA	619-1/2 308 (300-1/2)				
LNAV MDA	760-1/2 449 (500-1/2)		760-7/8 449 (500-7/8)		
CIRCLING	860-1 539 (600-1)	880-1 559 (600-1)	1000-2 679 (700-2)	1180-2 3/4 859 (900-2 3/4)	1180-3 859 (900-3)