
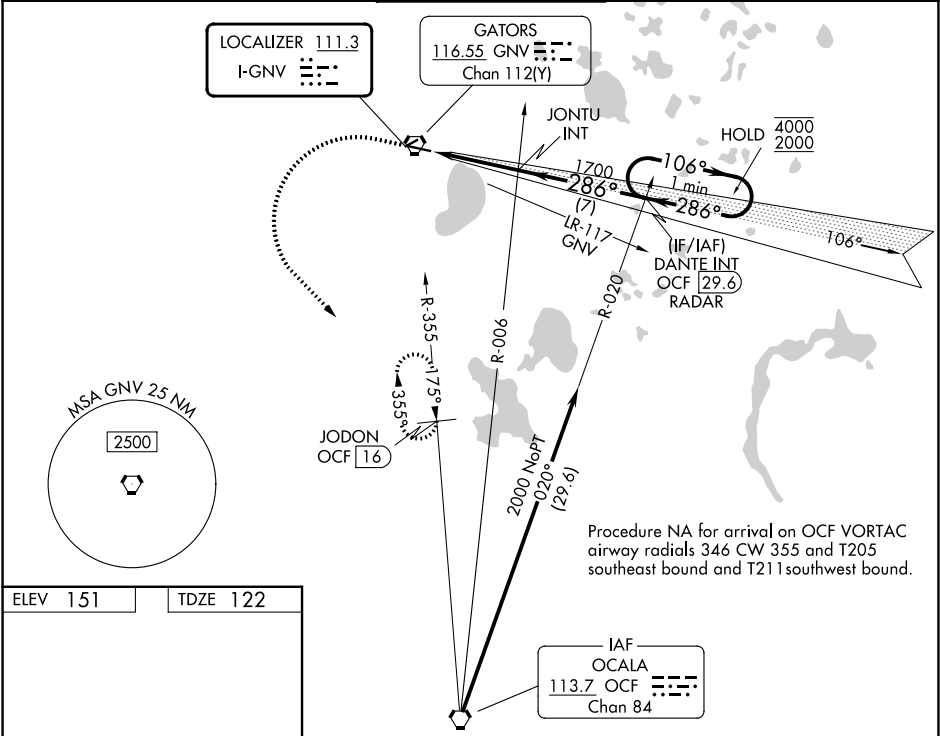


LOC I-GNV 111.3	APP CRS 286°	Rwy Ldg TDZE 122 Apt Elev 151
---------------------------	------------------------	---

ILS or LOC RWY 29
GAINESVILLE RGNL (GNV)

DME required. RADAR required for procedure entry at DANTE.			MALSR 	MISSED APPROACH: Climb to 1100 then climbing left turn to 2000 on heading 140° and OCF VORTAC R-355 to JODON/OCF 16 DME and hold.
▼ ▲ When local altimeter setting not received, use OCF altimeter setting and increase S-ILS 29 DA to 403 feet; increase all MDAs 100 feet and S-LOC 29 visibility Cat C/D to RVR 6000, and Circling visibility Cat C/D ½ SM. For inop ALS when using OCF altimeter setting, increase S-ILS 29 all Cats visibility to RVR 4500. * RVR 1800 authorized with use of FD or AP or HUD to DA (NA when using OCF altimeter setting.)				
ATIS 127.15	JACKSONVILLE APP CON 118.175 338.25	GAINESVILLE TOWER ★ 119.55 (CTAF) 0 353.7	GND CON 121.7	UNICOM 122.95



ELEV 151	TDZE 122
	
REIL Rwy 11 MIRL Rwy 7-25 HIRL Rwy 11-29	
FAF to MAP 4.8 NM	
Knots	60 90 120 150 180
Min:Sec	4:48 3:12 2:24 1:55 1:36

1100 ↑		2000 hdg 140°	OCF R-355 JODON OCF 16		DANTE INT OCF 29.6 RADAR		One Minute Holding Pattern	
		JONTU INT 1700		286°		106° ← 286° 4000 2000		
		4.8 NM		7 NM		GP 3.00° TCH 54		
CATEGORY	A		B		C		D	
S-ILS 29 *	322/24				200 (200-½)			
S-LOC 29	580/24		458 (500-½)		580/45		458 (500-¾)	
CIRCLING	620-1 469 (500-1)		700-1 549 (600-1)		760-1¾ 609 (700-1¼)		820-2 669 (700-2)	

SE-3, 03 SEP 2026 to 01 OCT 2026

SE-3, 03 SEP 2026 to 01 OCT 2026