


APP CRS	Rwy Ldg	7302
196°	TDZE	1320
	Apt Elev	1333


RNAV (RNP) Z RWY 19L
WICHITA DWIGHT D EISENHOWER NTL (ICT')

RNP AR APCH. For uncompensated Baro-VNAV systems, procedure NA below -15°C (5°F) or above 54°C (130°F). For inoperative MALS, increase RNP 0.11 all Cats visibility to ¾ mile and RNP 0.30 all Cats visibility to 1¼ mile. GPS required. Simultaneous approach authorized with ILS or LOC RWY 19R. Use of FD or AP providing RNAV track guidance required during simultaneous operations.	MALS 	MISSED APPROACH: Climb to 3600 on track 196° to YELOO and hold.
--	----------	---

ATIS 125.15	WICHITA APP CON 126.7 353.5	WICHITA TOWER 118.2 257.8	GND CON 121.9 348.6
----------------	--------------------------------	------------------------------	------------------------

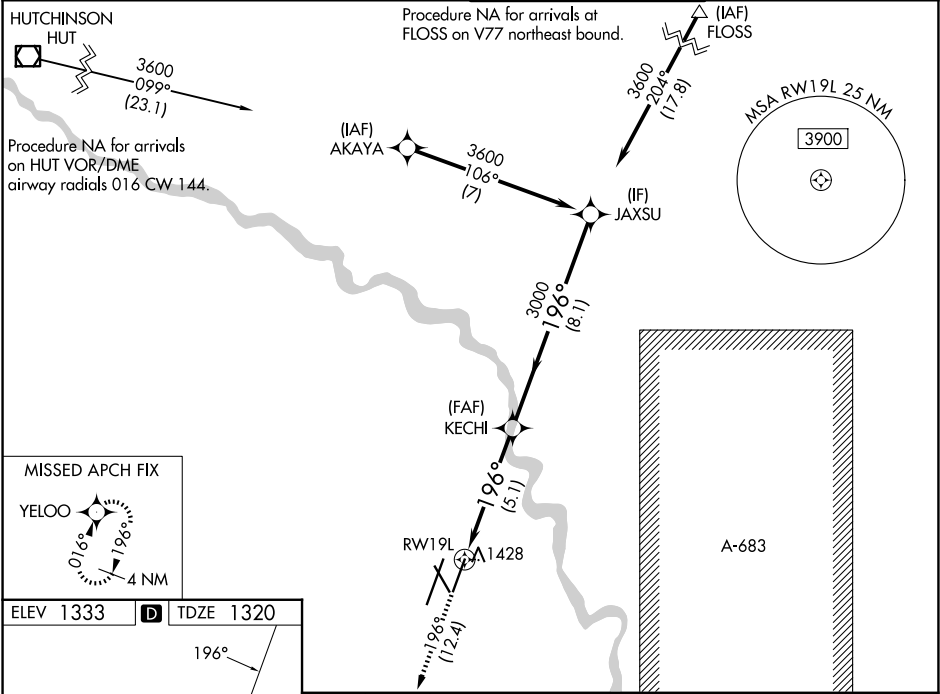

ELEV 1333	D	TDZE 1320
-----------	---	-----------

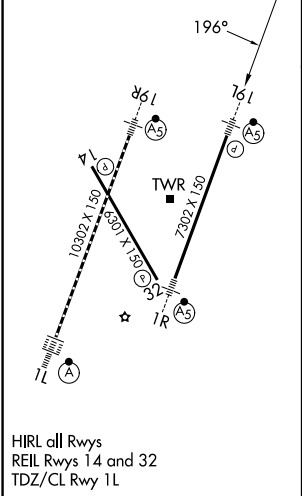

3600	YELOO				
↑ tr 196°	✴				
		KECHI		JAXSU	
		3000		3600	
RW19L		196°			
		3000			
		5.1 NM	8.1 NM		
				GP 3.00°	TCH 54
CATEGORY	A	B	C	D	
RNP 0.11 DA	1570-½ 250 (300-½)				
RNP 0.30 DA	1800-1⅛ 480 (500-1⅛)				
AUTHORIZATION REQUIRED					