

LOC I-FKL	APP CRS	Rwy Ldg	5200
110.5	207°	TDZE	1540
		Apt Elev	1540

ILS or LOC RWY 21

VENANGO RGNL (F'KL)

RADAR required to define DACCA.
RADAR required for procedure entry.

T

A


For inop ALS, increase S-LOC 21 Cat C/D visibility to 1 SM.
Circling Rwy 12 NA at night.

MALSR

AS

MISSED APPROACH: Climb to 2200 then climbing right turn to 3400 direct FKL VOR and hold, continue climb-in-hold to 3400.

AWOS-3PT	YOUNGSTOWN APP CON ★	CLNC DEL	UNICOM
118.175	126.25 322.3	126.25	122.7 (CTAF) 0

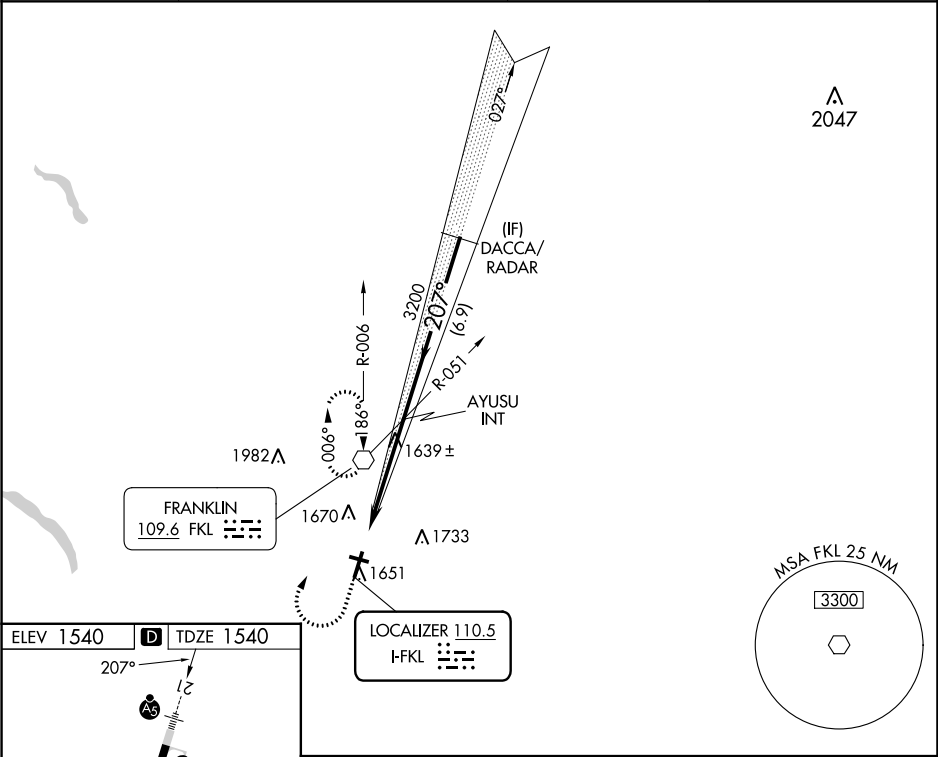

ELEV 1540

D

TDZE 1540

207°

1596

3593 X 100

5200 X 150

30

3

MIRL Rwy 12-30

HIRL Rwy 3-21

FAF to MAP 5 NM

Knots	60	90	120	150	180
Min:Sec	5:00	3:20	2:30	2:00	1:40

2200

3400

FKL

AYUSU INT

3200

207°

3400

GS 3.00°

TCH 55

5 NM

6.9 NM

CATEGORY	A	B	C	D
S-ILS-21	1740-½ 200 (200-½)			
S-LOC-21	1900-½ 360 (400-½)		1900-⅝ 360 (400-⅝)	
CIRCLING	1960-1 420 (500-1)	2000-1 460 (500-1)	2040-1½ 500 (500-1½)	2100-2 560 (600-2)