

WAAS CH 77831 W07A	APP CRS 069°	Rwy Ldg TDZE 812 Apt Elev 812	5506
--	------------------------	---	-------------

RNAV (GPS) RWY 7


CAPITAL CITY (F'TT)

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Lexington altimeter setting and increase LPV DA to 1149 feet and LNAV/VNAV DA to 1293 feet and all visibilities ¼ mile; increase all MDAs 80 feet, LNAV visibility Cats C and D ½ mile, and Circling visibility Cats C and D ¼ mile. VDP and Baro-VNAV NA with Lexington altimeter setting. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH:
Climb to 3000 direct CUKRI and hold.

ASOS 119.275	LEXINGTON APP CON 120.75 298.9	CLNC DEL 118.65	UNICOM 122.8 (CTAF) 0
------------------------	--	---------------------------	---------------------------------

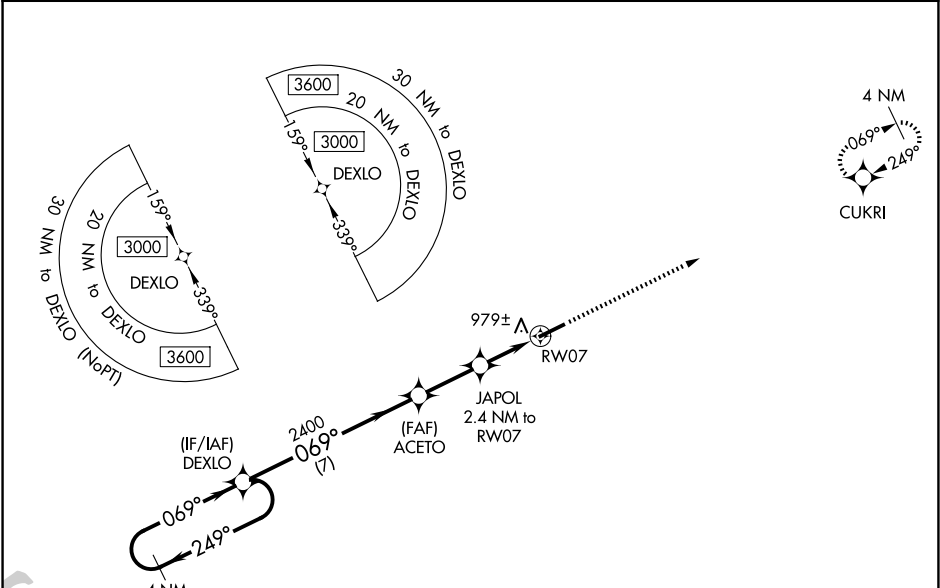

ELEV 812		TDZE 812	
4 NM Holding Pattern DEXLO		3000 CUKRI	
GP 3.00° TCH 45		ACETO 2400	
2400		JAPOL 2.4 NM to RW07	
7 NM		*1.3 NM to RW07	
2.4 NM		RW07	
1.2		1.3	
CATEGORY	A	B	C
LPV DA	1087-7/8 275 (300-7/8)		
LNAV/VNAV DA	1231-13/8 419 (500-13/8)		
LNAV MDA	1240-1	428 (500-1)	1240-1 4/4 428 (500-1 1/4)
CIRCLING	1280-1	1380-1	1440-1 3/4 1440-2
	468 (500-1)	568 (600-1)	628 (700-1 3/4) 628 (700-2)
MIRL Rwy 7-25 0			
REIL Rwy 7 and 25 0			