

WAAS

CH **99413**

W18A

APP CRS

179°

Rwy Ldg

6143

TDZE

8

Apt Elev

9

RNAV (GPS) RWY 18

HOUMA-TERREBONNE (HUM)

RNP APCH - GPS.



⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Baro-VNAV and VDP NA when using MSY altimeter setting. When local altimeter setting not received, use MSY altimeter setting and increase LPV DA to 286 feet; increase LNAV/VNAV DA to 517 feet and all visibilities ¼ SM. Increase all MDAs 80 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ¼ SM.

MALSR

MISSED APPROACH:
Climb to 1900 direct ITIWE and hold.

ATIS 120.25	NEW ORLEANS APP CON 118.9 350.35	HOUMA TOWER ★ 125.3 (CTAF) 0 346.3	GND CON 123.875	UNICOM 122.95
-----------------------	--	--	---------------------------	-------------------------

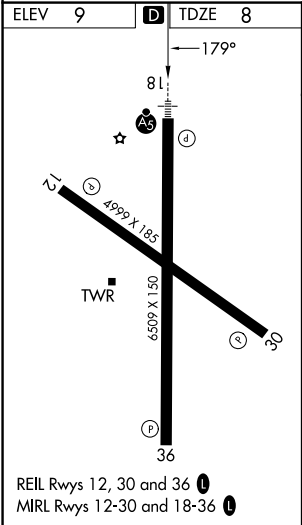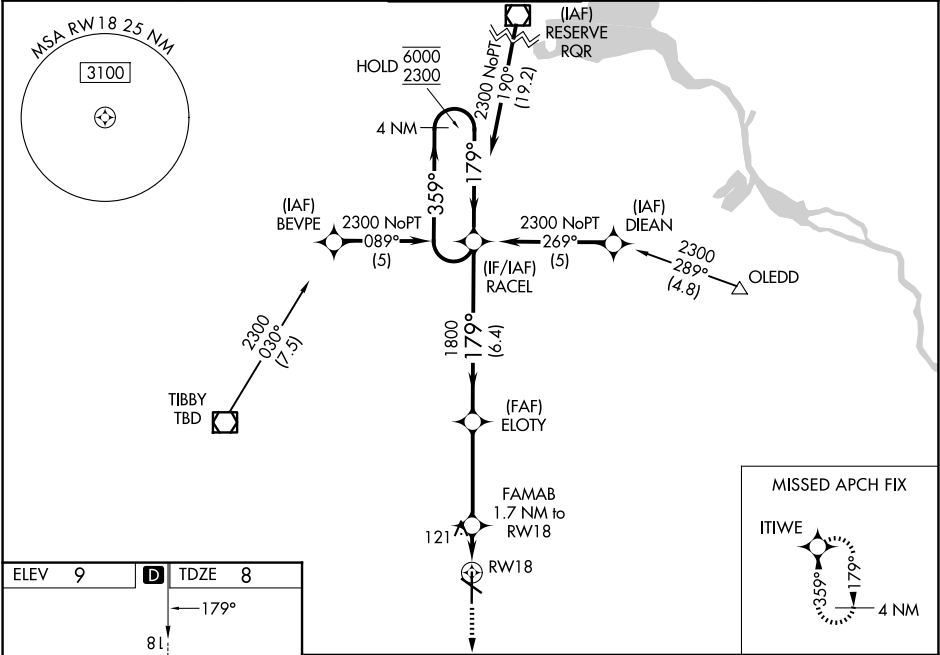

1900	ITIWE	RACEL Holding Pattern			
CATEGORY	A	B	C	D	
LPV DA	209-1½ 201 (200-½)				
LNAV/VNAV DA	440-½	432 (500-½)	440-¾	432 (500-¾)	
LNAV MDA	440-½	432 (500-½)	440-¾	432 (500-¾)	
CIRCLING	480-1	471 (500-1)	760-2¼ 751 (800-2¼)	760-2½ 751 (800-2½)	