

LOC/DME I-TLH

110.3

Chan 40

APCH CRS

004°

Rwy Idg

7001

TDZE

62

Arpt Elev

83

[USAF]

TALLAHASSEE INTL (KTLH)

RADAR, DME required

MALSR

A5

MISSED APPROACH: Climb to 4000 direct SZW VORTAC then on SZW R-288 to QUILL/SZW 11.8 DME and hold.


⚠

* When ALS inop, increase CAT E RVR to 40, vis to ¾ mile. RVR 18 authorized with use of FD or AP or HUD to DA.

⚠

** When ALS inop, increase CAT E RVR 60, vis to 1½ mile.

ATIS	TALLAHASSEE APP CON★	TOWER★	GND CON	CLNC DEL	ASR
119.45 239.25	135.8 317.4 (001° - 180°) 128.7 254.3 (181° - 360°)	118.7 (CTAF) 0 257.8	121.9 348.6	126.65 275.8	

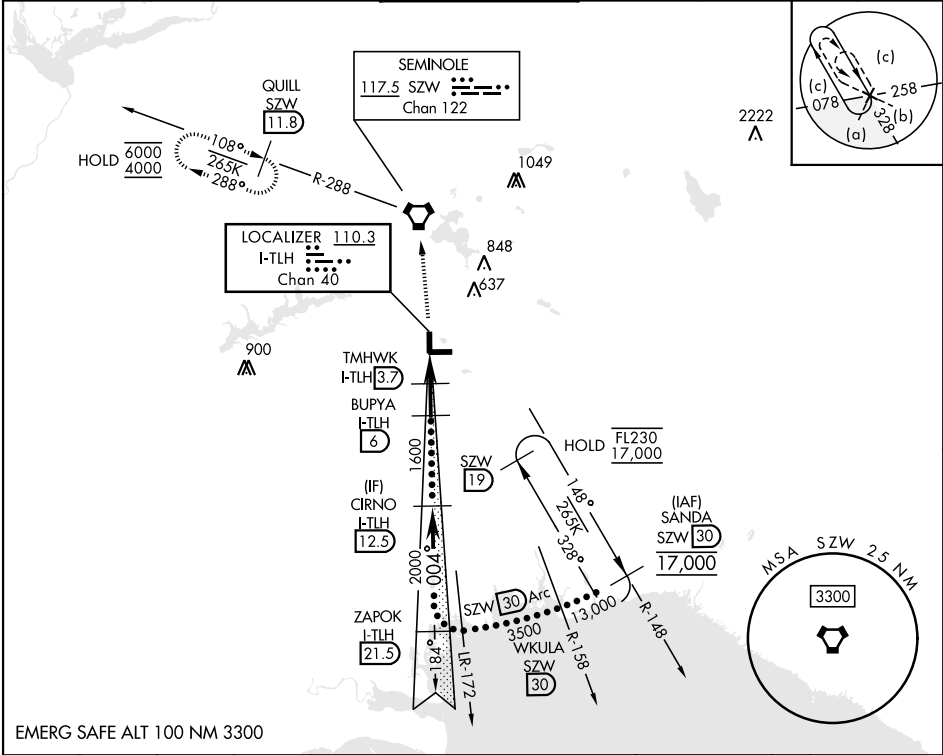

4000

SZW

SZW R-288

QUILL SZW 11.8

TMHWK I-TLH 3.7

BUPYA I-TLH 6

CIRNO I-TLH 12.5

ZAPOK I-TLH 21.5

1600

2000

GS 3.00°

TCH 54

CATEGORY	C	D	E
S-ILS 36★	262/24	200 (200-½)	
S-LOC 36**	460/35	398 (400-¾)	
CIRCLING	640-1½ 557 (600-1½)	800-2¼ 717 (800-2¼)	1000-3 917 (1000-3)

ELEV 83

TDZE 62

81

7001 x 150 0.4% UP

142

36

7999 x 150

143

TWR 210

004°

HIRL Rwy 9-27, 18-36

REIL Rwy 9, 18

TDZL/RCLS Rwy 27