


LOC/DME I-PLQ	APP CRS	Rwy Ldg	8000
111.9	274°	TDZE	58
Chan 56		Apt Elev	83

ILS or LOC RWY 27


TALLAHASSEE INTL (TLH)

DME required.	ALSF-2	MISSED APPROACH: Climb to 2000 then climbing right turn to 4000 on heading 092° and on SZW VORTAC R-140 to GACED INT/SZW 12.4 DME and hold, continue climb-in-hold to 4000.
For inop ALS, increase S-ILS 27 Cat E visibility to RVR 4000 and S-LOC 27 Cat E visibility to 2 SM.		

ATIS 119.45 239.25	TALLAHASSEE APP CON ★ 135.8 317.4	TALLAHASSEE TOWER ★ 118.7 (CTAF) 257.8	GND CON 121.9 348.6	UNICOM 123.075
------------------------------	---	--	-------------------------------	--------------------------

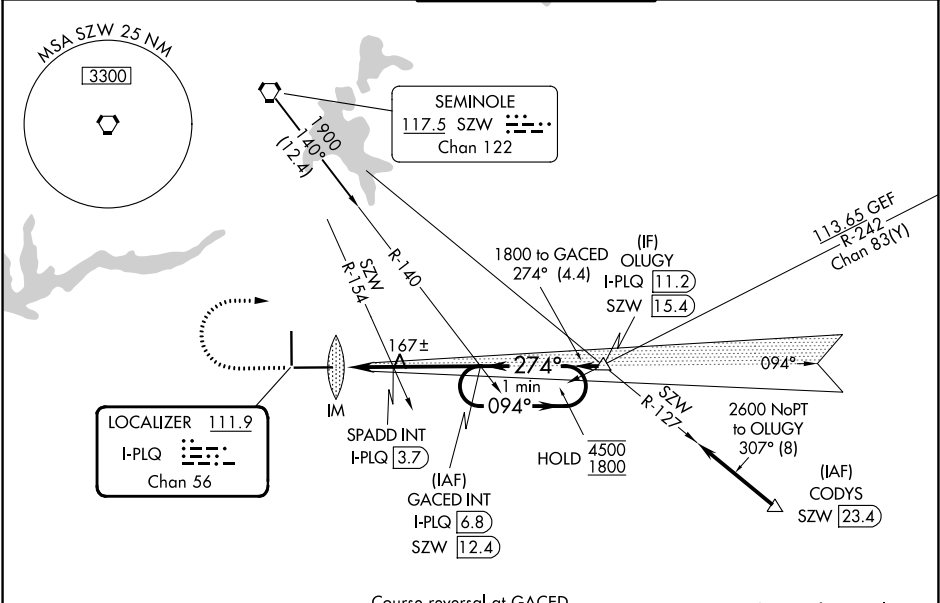

ELEV 83	TDZE 58
---------	---------



TDZL/RCLS Rwy 27	REIL Rwy 9 and 18	HIRL Rwy 9-27 and 18-36
FAF to MAP 5.3 NM		
Knots	60	90 120 150 180
Min:Sec	5:18	3:32 2:39 2:07 1:46

2000	4000	SZW	GACED INT	GACED INT	One Minute Holding Pattern
↑	hdg 092°	R-140	INT	I-PLQ 6.8 SZW 12.4	
CATEGORY	A	B	C	D	E
S-ILS 27	258/18 200 (200-½)				
S-LOC 27	740/24	682 (700-½)	740-1½	682 (700-1½)	
CIRCLING	740-1	657 (700-1)	740-2 657 (700-2)	800-2¼ 717 (800-2¼)	1000-3 917 (1000-3)