

WAAS CH 65600 W18A	APP CRS 184°	Rwy Ldg 7000 TDZE 83 Apt Elev 83
--	------------------------	---

RNAV (GPS) RWY 18

TALLAHASSEE INTL (TLH)

RNP APCH.


▼

▲

Rwy 18 helicopter visibility reduction below ¾ SM NA.
For uncompensated Baro-VNAV systems, LNAV/VNAV
NA below -5°C or above 54°C.

MISSED APPROACH: Climb to 3000 direct HEMUX
and hold.

ATIS 119.45 239.25	TALLAHASSEE APP CON ★ 135.8 317.4	TALLAHASSEE TOWER ★ 118.7 (CTAF) 0 257.8	GND CON 121.9 348.6	UNICOM 123.075
------------------------------	---	--	-------------------------------	--------------------------

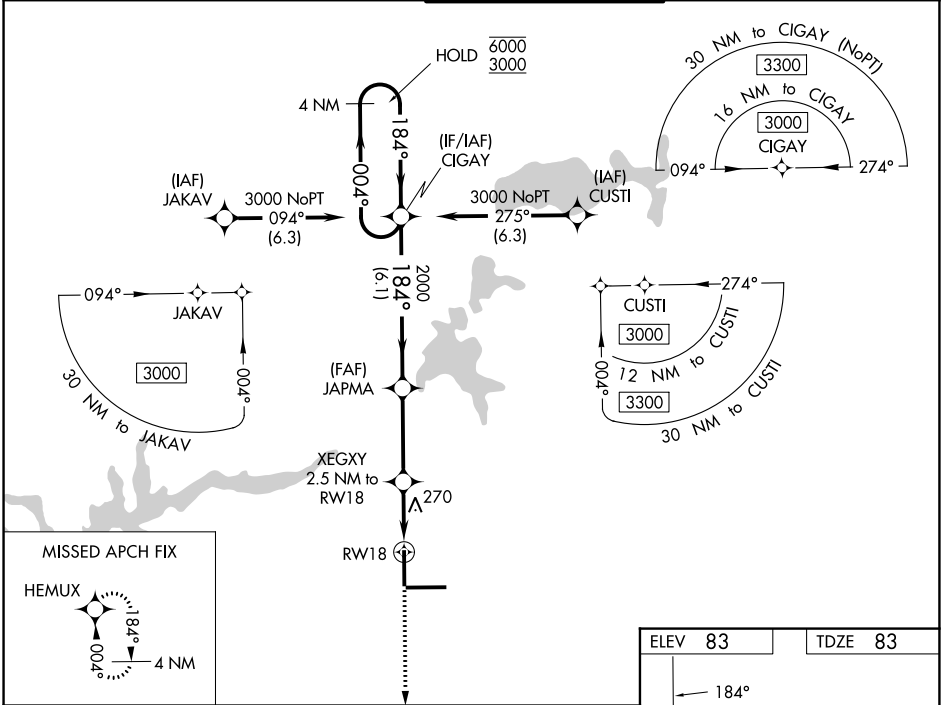

4 NM Holding Pattern				
GP 3.00° TCH 55				
CIGAY				
JAPMA				
XEGXY 2.5 NM to RW18				
RW18				
HEMUX				
*920				
*LNAV only.				
6.1 NM 3.4 NM 1.3 NM 1.2 NM				
CATEGORY	A	B	C	D
LPV DA	333-¾		250 (300-¾)	
LNAV/VNAV DA	537-1½		454 (500-1½)	
LNAV MDA	520-1 437 (500-1)		520-1¼ 437 (500-1¼)	
CIRCLING	580-1 497 (500-1)		640-1½ 557 (600-1½)	
	600-1 517 (600-1)		800-2¼ 717 (800-2¼)	

