


WAAS CH 86511 W21A	APP CRS 211°	Rwy Ldg TDZE 1110 Apt Elev 1110	6028
--	------------------------	---	-------------

RNAV (GPS) RWY 21

STEVENS POINT MUNI (STE)

RNP APCH - GPS. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Inop table does not apply to LPV all Cats. For inop ALS, increase LNAV Cat C and D visibility to 1½ SM.		MALS 	MISSED APPROACH: Climb to 2800 direct FAYYE and hold.
AWOS-3 119.275	MINNEAPOLIS CENTER 124.4 317.7	UNICOM 122.7 (CTAF)	

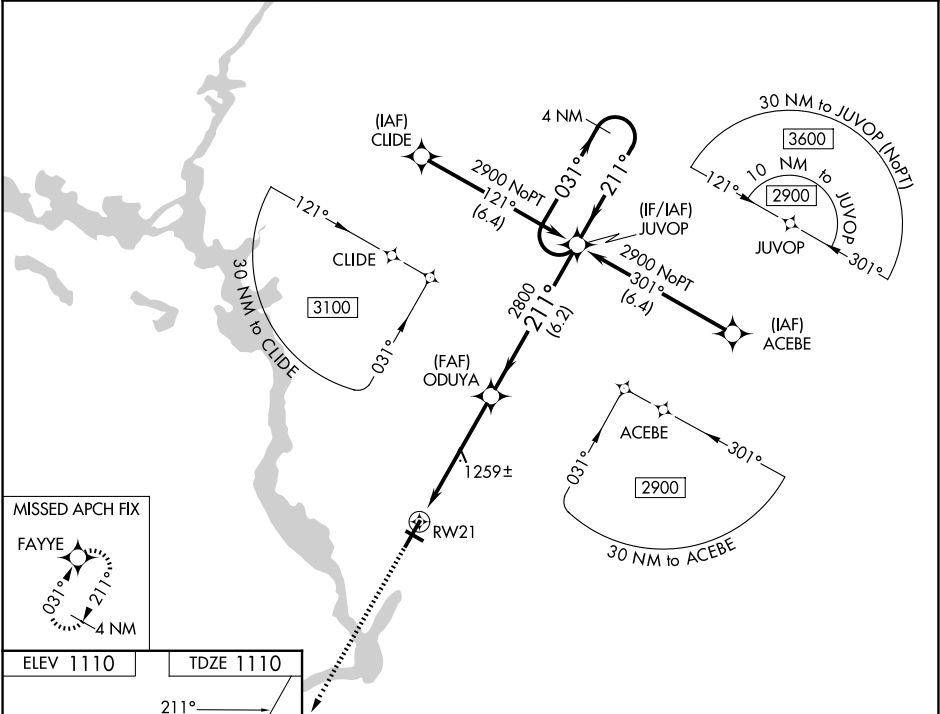

REIL Rwy 3
HIRL Rwys 3-21 and 12-30

2800

↑

FAYYE

1.2 NM to RW21

1.2 NM

4 NM

6.2 NM

ODUYA

2800

211°

2800

JUVOP

031° →

← 211°

2900

4 NM

Holding Pattern

GP 3.00°

TCH 44

CATEGORY	A	B	C	D
LPV DA	1360-¾ 250 (300-¾)			
LNAV/VNAV DA	1457-¾ 347 (400-¾)			
LNAV MDA	1520-¾ 410 (500-¾)		1520-1 410 (500-1)	
CIRCLING	1580-1 470 (500-1)	1600-1 490 (500-1)	1860-2¼ 750 (800-2¼)	1860-2½ 750 (800-2½)