


|                           |                        |                                                                          |
|---------------------------|------------------------|--------------------------------------------------------------------------|
| LOC I-CSV<br><b>109.1</b> | APP CRS<br><b>255°</b> | Rwy Ldg<br>TDZE<br>Apt Elev<br><b>5423</b><br><b>1871</b><br><b>1882</b> |
|---------------------------|------------------------|--------------------------------------------------------------------------|

ILS Y or LOC Y RWY 26

CROSSVILLE MEML-WHITSON FLD (CSV)

|                                           |                                                                                             |
|-------------------------------------------|---------------------------------------------------------------------------------------------|
| RNP APCH - GPS.                           | MISSED APPROACH: Climb to 3200 then climbing left turn to 5000 direct HCH VOR/DME and hold. |
| Autopilot coupled approach NA below 2500. |                                                                                             |

|                        |                                      |                                        |
|------------------------|--------------------------------------|----------------------------------------|
| ASOS<br><b>120.625</b> | ATLANTA CENTER<br><b>133.6 254.3</b> | UNICOM<br><b>122.7 (CTAF)</b> <b>0</b> |
|------------------------|--------------------------------------|----------------------------------------|

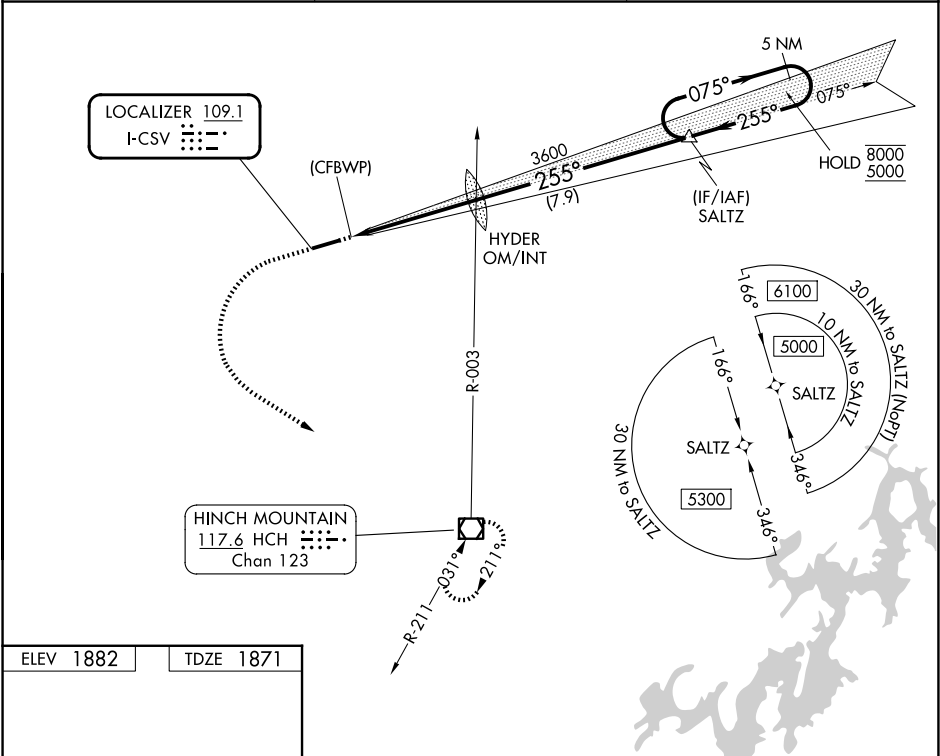

|                                       |                          |
|---------------------------------------|--------------------------|
| ELEV 1882                             | TDZE 1871                |
|                                       |                          |
| REIL Rwy 26<br>HIRL Rwy 8-26 <b>0</b> |                          |
| FAF to MAP 4.7 NM                     |                          |
| Knots                                 | 60 90 120 150 180        |
| Min:Sec                               | 4:42 3:08 2:21 1:53 1:34 |

|                             |                    |             |                         |                       |
|-----------------------------|--------------------|-------------|-------------------------|-----------------------|
| 3200                        | 5000               | HCH         | 5 NM Holding Pattern    |                       |
| LOC unusable inside 0.5 NM. | HYDER OM/INT       | 3557        | 3600                    |                       |
| (CFBWP)                     | 255°               | 075°        | 8000                    | 5000                  |
| 0.5                         | 4.7 NM             | 7.9 NM      | GS 3.00°                | TCH 60                |
| CATEGORY                    | A                  | B           | C                       | D                     |
| S-ILS 26                    | 2121-¾ 250 (300-¾) |             |                         |                       |
| S-LOC 26                    | 2440-1             | 569 (600-1) | 2440-1⅝                 | 569 (600-1⅝)          |
| CIRCLING                    | 2440-1             | 558 (600-1) | 2440-1⅝<br>558 (600-1⅝) | 2540-2<br>658 (700-2) |