

WAAS CH 70615 W27A	APP CRS 275°	Rwy Ldg TDZE Apt Elev	6520 974 981
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 27L

OAKLAND COUNTY INTL (PTK)

RNP APCH - GPS.


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using DET altimeter setting. Circling Rwy 9L, 36 NA at night. When local altimeter setting not received, use DET altimeter setting: increase LPV DA to 1280 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 1566 feet; increase all MDAs 120 feet and LNAV visibility Cat C ¾ SM, LNAV visibility Cat D ¼ SM, and Circling visibility Cats C/D ½ SM.

MISSED APPROACH:
Climb to 3000 direct
EDESE and hold.

ATIS 125.025	DETROIT APP CON 132.35 284.0	PONTIAC TOWER ★ 120.5 (CTAF) 0	GND CON 121.9	UNICOM 122.95
------------------------	--	--	-------------------------	-------------------------

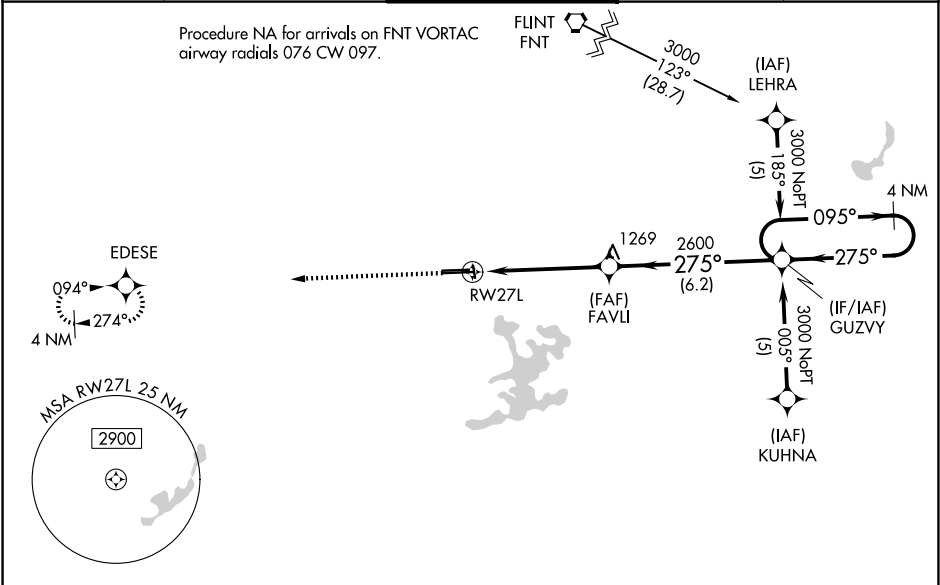

ELEV 981 **D** TDZE 974

HIRL Rwy 9R-27L 0
MIRL Rwy 9L-27R
REIL Rwy 27L 0
REIL Rwy 9L and 27R

3000

↑

EDESE

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 42).

4 NM
Holding Pattern

FAVLI

2600

275°

095° →

← 275°

3000

GP 3.00°

TCH 47

1.4

3.5 NM

6.2 NM

RW27L

1.4 NM to RW27L

2600

GUZVY

CATEGORY	A	B	C	D
LPV DA	1174-3⁄4 200 (200-3⁄4)			
LNAV/VNAV DA	1460-13⁄4 486 (500-13⁄4)			
LNAV MDA	1460-1	486 (500-1)	1460-13⁄8 486 (500-13⁄8)	1460-11⁄2 486 (500-11⁄2)
CIRCLING	1500-1 519 (600-1)	1540-1 559 (600-1)	1640-13⁄4 659 (700-13⁄4)	1640-2 659 (700-2)