

WAAS CH 65629 W15A	APP CRS 152°	Rwy Ldg 6500 TDZE 11 Apt Elev 15
--	------------------------	---

RNAV (GPS) RWY 15

LAKE CHARLES RGNL (LCH)


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -3°C. or above 43°C.
For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500 and LNAV Cats C and D visibility to 1 3/8 SM.
* RVR 1800 authorized with use of FD or AP or HUD to DA.

MAISR

MISSED APPROACH:
Climb to 1900 direct
SOTLE and hold.

ATIS 118.75	LAKE CHARLES APP CON★ 119.35 353.75	LAKE CHARLES TOWER★ 120.7 (CTAF) 257.8	GND CON 121.8	UNICOM 122.95
-----------------------	---	--	-------------------------	-------------------------

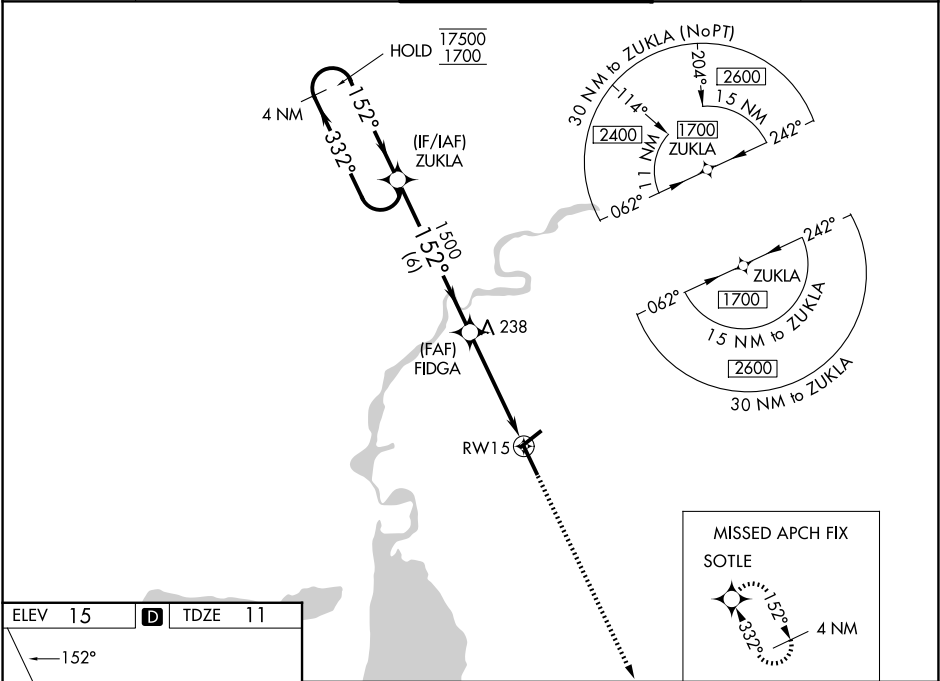

ELEV 15 D TDZE 11

REIL Rws 5 and 23
MIRL Rwy 5-23
HIRL Rwy 15-33

4 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 70).		1900	SOTLE
ZUKLA		FIDGA		RWY 15	
17500 1700		1500		1.3 NM to RWY 15	
GP 3.00° TCH 55		1500		6 NM	
332°		152°		3.2 NM	
152°		1500		1.3	
CATEGORY	A	B	C	D	
LPV DA *	211/24		200 (200-1/2)		
LNAV/VNAV DA	300/24		289 (300-1/2)		
LNAV MDA	500/24		500/50		489 (500-1)
CIRCLING	500-1		580-1 1/2		680-2
	485 (500-1)		565 (600-1 1/2)		665 (700-2)

SC-4, 03 SEP 2026 to 01 OCT 2026

SC-4, 03 SEP 2026 to 01 OCT 2026