WAAS	APP CRS	Rwy Ldg	7400
CH 78406	313°	TDZE	1166
W31A		Apt Elev	1182

RNAV (GPS) RWY 31

FALLS INTL/EINARSON FLD (INL)

When local altimeter setting not received, use Baudette altimeter setting: increase LPV DA to 1589 feet and visibility all Cats ½ SM; increase LNAV/VNAV DA to 1627 feet and visibility all Cats ½ SM; increase all MDAs 140 feet and visibility LNAV Cat C ¼ SM and Circling Cat C and D ½ SM. For inop MALSR when using Baudette altimeter setting, increase LPV visibility ½ mile all Cats. For inop MALSR, increase LPV visibility ½ mile all Cats, inop table does not apply to LNAV Cat D. VDP NA when using Baudette altimeter setting. Baro-VNAV NA when using Baudette altimeter setting. Circling to Rwy 4-22 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 47°C (116°F). DME/DME RNP-0.3 NA.

MALSR

MISSED APPROACH: Climb to 3300 direct HODEV and hold.

ASOS	MINNEAPOLIS CENTER	UNICOM
120.0	120.9 377.1	122.8 (CTAF) L

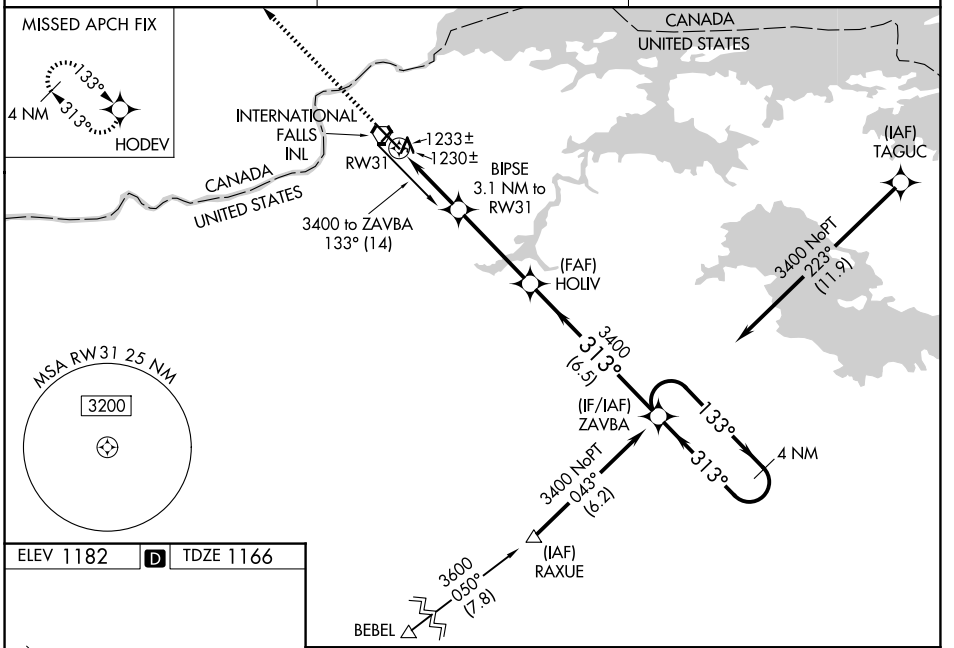

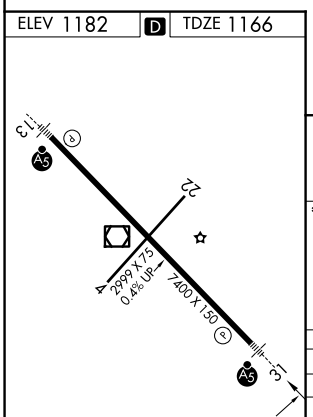

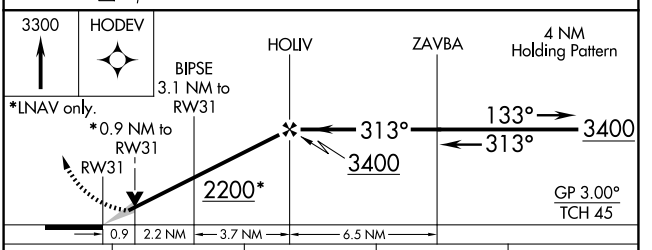

CATEGORY	A	B	C	D
LPV DA	1462-½ 296 (300-½)			
LNAV/VNAV DA	1500-¾ 334 (400-¾)			
LNAV MDA	1500-½ 334 (400-½)			1500-1 334 (400-1)
CIRCLING	1620-1 438 (500-1)	1680-1 498 (500-1)	1900-2 718 (800-2)	1900-2¼ 718 (800-2¼)

HIRL Rwy 13-31 L

NC-1, 03 SEP 2026 to 01 OCT 2026
NC-1, 03 SEP 2026 to 01 OCT 2026