

WAAS CH 53618 W10A	APP CRS 097°	Rwy Ldg TDZE 756 Apt Elev 759
--	------------------------	---

RNAV (GPS) RWY 10



DUPAGE (DPA)

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Aurora altimeter setting: increase LPV DA to 993 feet and LNAV/VNAV DA to 1281; increase all MDA 40 feet and visibility LNAV Cat D and Circling Cat C/D ¼ SM. VDP and Baro-VNAV NA when using Aurora altimeter setting. Circling Rwy 15, 28, 33 NA at night.

MISSED APPROACH: Climb to 2600 direct PEPRE and right turn on track 204° to JOT VOR/DME and hold.

ATIS 132.075	CHICAGO APP CON 133.5 349.0	DUPAGE TOWER 120.9 257.8	GND CON 121.8
------------------------	---------------------------------------	------------------------------------	-------------------------

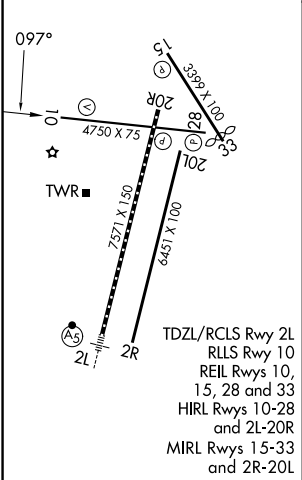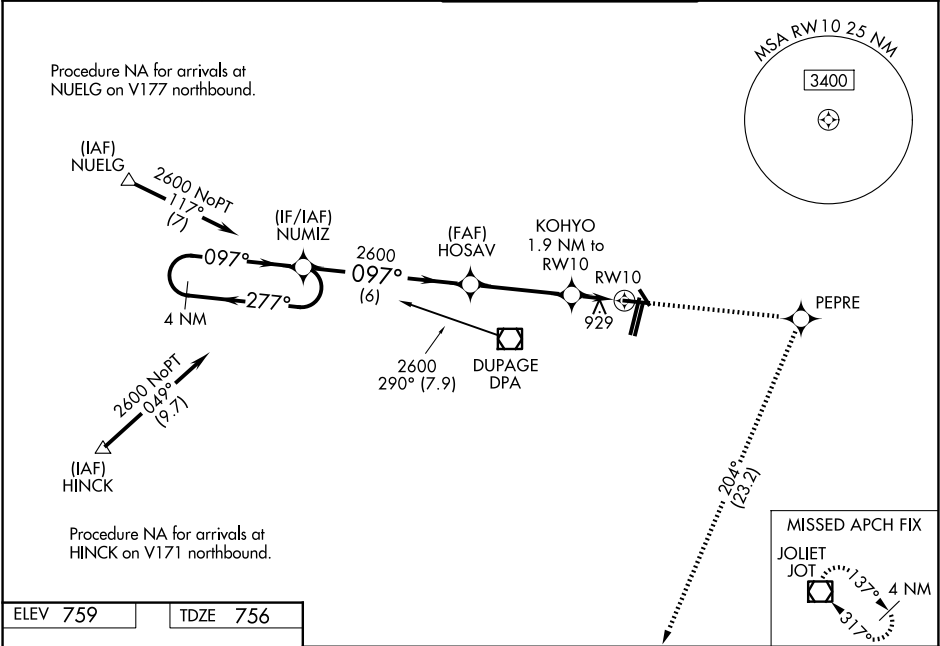

4 NM Holding Pattern		NUMIZ	HOSAV	KOHYO	*LNAV only	
2600		2600	2600	1.9 NM to RW10	*1.2 NM to RW10	
GP 3.00°		2600	2600	1.9 NM to RW10	*1.2 NM to RW10	
TCH 50		2600	2600	1.9 NM to RW10	*1.2 NM to RW10	
6 NM		3.7 NM	0.7	1.2 NM		
CATEGORY	A	B	C	D		
LPV DA	956-¾		200 (200-¾)			
LNAV/VNAV DA	1244-1¾		488 (500-1¾)			
LNAV MDA	1180-1	424 (500-1)	1180-1¼	424 (500-1¼)		
CIRCLING	1260-1	1360-1	1460-2	1460-2¼		
	501 (600-1)	601 (700-1)	701 (800-2)	701 (800-2¼)		