

WAAS CH 77507 W29A	APP CRS 294°	Rwy Ldg TDZE 531 Apt Elev 544
--	------------------------	---

RNAV (GPS) RWY 29

ST LOUIS RGNL (ALN)


RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM and LNAV Cat C/D visibility to 1 SM.

MALSR

MISSED APPROACH:
Climb to 2400 direct
SQUAR and hold.

ATIS 128.0	ST LOUIS APP CON 124.2 353.9	REGIONAL TOWER★ 126.0(CTAF) 0 239.0	GND CON 120.2	UNICOM 122.95
----------------------	--	---	-------------------------	-------------------------

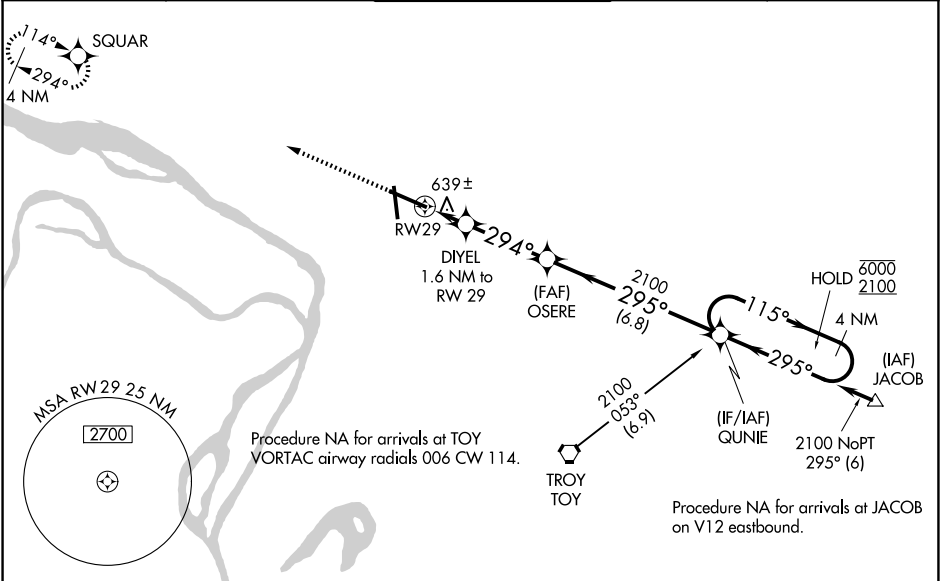

ELEV **544** **D** TDZE **531**

REIL Rwy 11 1
HIRL Rwy 11-29 1
MIRL Rwy 17-35 1

8099 X 150
6500 X 100
35

2400 SQUAR				
*LNAV only.				
DIYEL 1.6 NM to RW29 OSERE 2100 QUNIE 4 NM Holding Pattern				
*1 NM to RW29				
RW29 294° 2100 295° 115° 6000 2100 GP 3.00° TCH 55				
1 NM 0.6 NM 3.2 NM 6.8 NM				
CATEGORY	A	B	C	D
LPV DA	731-½		200 (200-½)	
LNAV/VNAV DA	825-½		294 (300-½)	
LNAV MDA	900-½ 369 (400-½)		900-¾ 369 (400-¾)	
CIRCLING	1000-1 456 (500-1)		1160-1¾ 616 (700-1¾) 1200-2 656 (700-2)	