

APP CRS	Rwy Ldg	6500
354°	TDZE	544
	Apt Elev	544

RNAV (GPS) RWY 35
ST LOUIS RGNL (ALN)

RNP APCH.

T Visibility reduction by helicopters NA. When local altimeter setting not received, use St Louis Lambert Intl altimeter setting and increase all MDA 60 feet, increase LNAV Cat C/ D visibility $\frac{1}{8}$ SM and Circling Cat C/D visibility $\frac{1}{4}$ SM. When VGSI inop, straight-in/Circling Rwy 35 procedure and Circling Rwy 17 NA at night.


MISSED APPROACH: Climb to 2200 direct JETIK and hold.

ATIS
128.0


ST LOUIS APP CON

REGIONAL TOWER★
126.0 (CTAF) **L** 239.0

GND CON
120.2

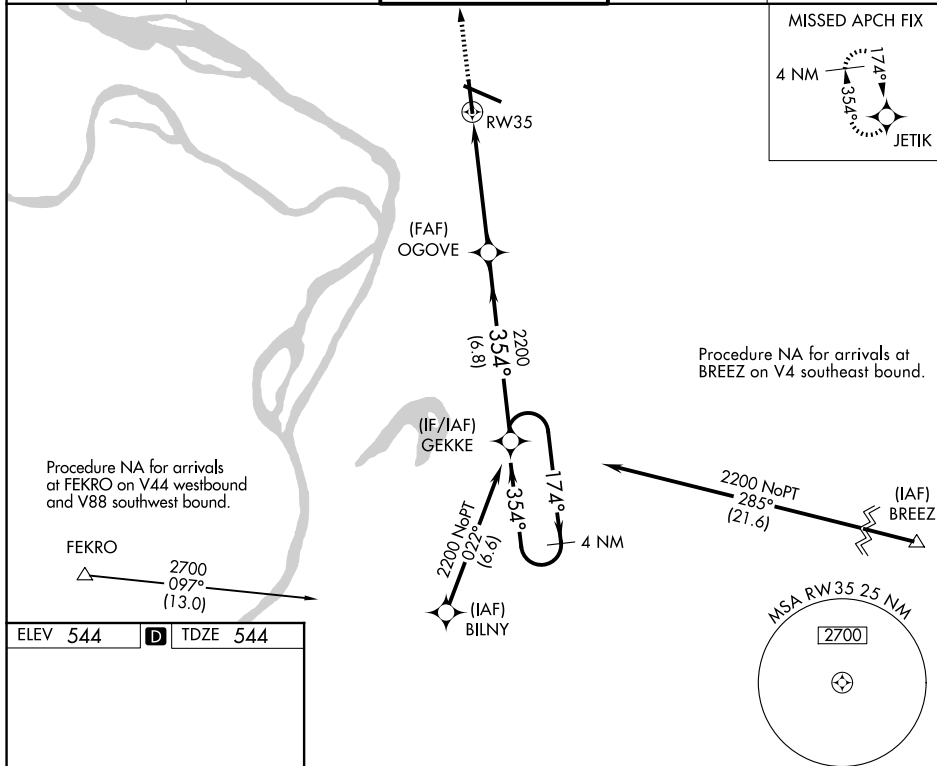UNICOM
122.95


ELEV 544	D	TDZE 544
----------	----------	----------

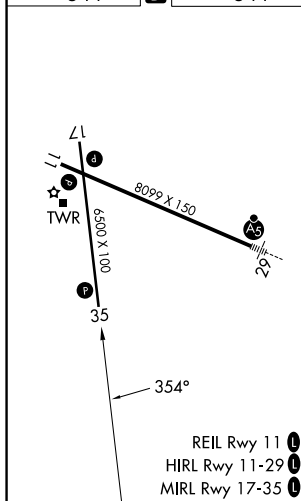

2200	JETIK
	

Visual Segment - Obstacles.

4 NM
Holding Pattern

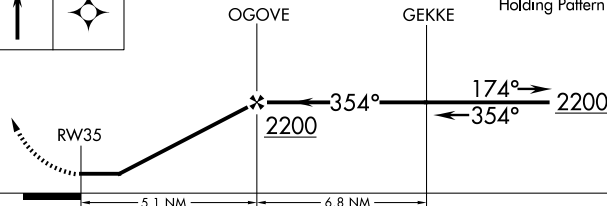

CATEGORY	A	B	C	D
LNAV MDA	1020-1	476 (500-1)	1020-1 $\frac{3}{8}$	476 (500-1 $\frac{3}{8}$)
CIRCLING	1020-1	476 (500-1)	1160-1 $\frac{3}{4}$ 616 (700-1 $\frac{3}{4}$)	1200-2 656 (600-2)