


WAAS CH 70313 W35A	APP CRS 354°	Rwy Ldg TDZE 845 Apt Elev 845
--	------------------------	---

RNAV (GPS) RWY 35L

GRAND FORKS INTL (GFK)

RNP APCH. ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.6°C or above 54°C. For Inop ALS, increase LNAV/VNAV Cat D visibility to RVR 5000 and LNAV Cat C/D visibility to RVR 5500.		MALSRR 	MISSED APPROACH: Climb to 2600 direct FODIB and hold.	
ATIS 119.4	GRAND FORKS APP CON ★ 118.1 318.1	GRAND FORKS TOWER ★ 118.4 (CTAF) 0 350.35 (17R/35L, 9L/27R) 120.55 350.35 (17L/35R, 9R/27L)	GND CON 124.575	UNICOM 122.95

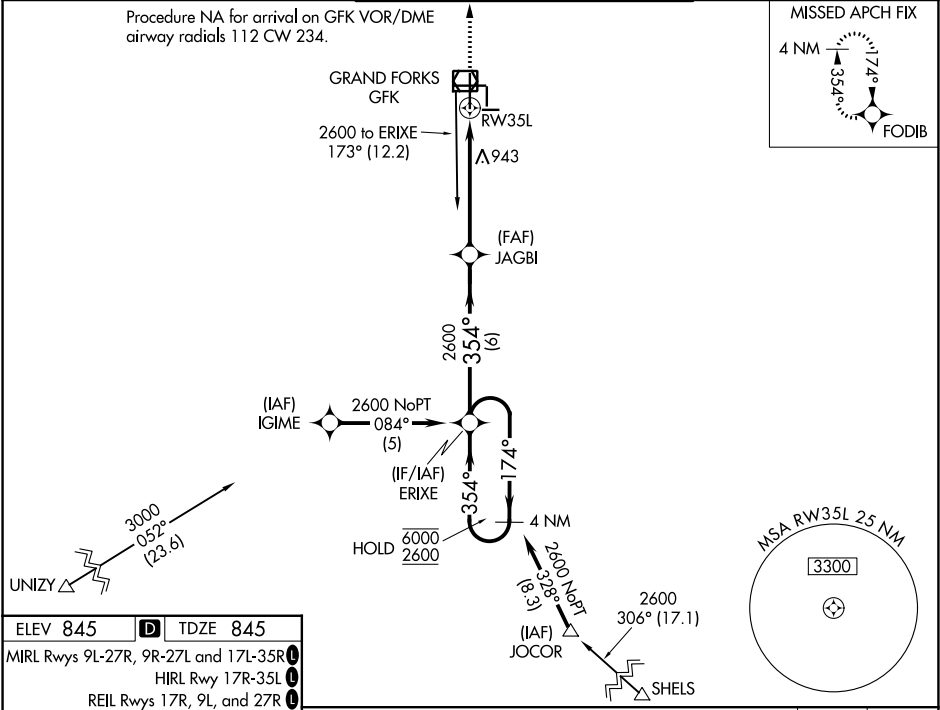

ELEV 845	D	TDZE 845
MIRL Rwy 9L-27R, 9R-27L and 17L-35R		
HIRL Rwy 17R-35L		
REIL Rwy 17R, 9L, and 27R		

