


WAAS CH 50231 W05A	APP CRS 047°	Rwy Ldg TDZE 429 Apt Elev 441
--	------------------------	---

RNAV (GPS) RWY 5

NORTH CENTRAL STATE (SF'Z)

RNP APCH - GPS.	MALS 	MISSED APPROACH: Climb to 2000 then climbing left turn to 2500 direct FOSTY and hold.
 Circling Rwy 15, 33 NA at night. For inoperative MALS, increase LPV all Cats visibility to ¾ mile. For inop ALS, increase LPV all Cats visibility to ¾ SM and LNAV/VNAV all Cats visibility to 1 ½ SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.		

AWOS-3PT 120.775	PROVIDENCE APP CON ★ 123.675 244.875	CLNC DEL 124.35	UNICOM 123.075 (CTAF) 
----------------------------	--	---------------------------	---

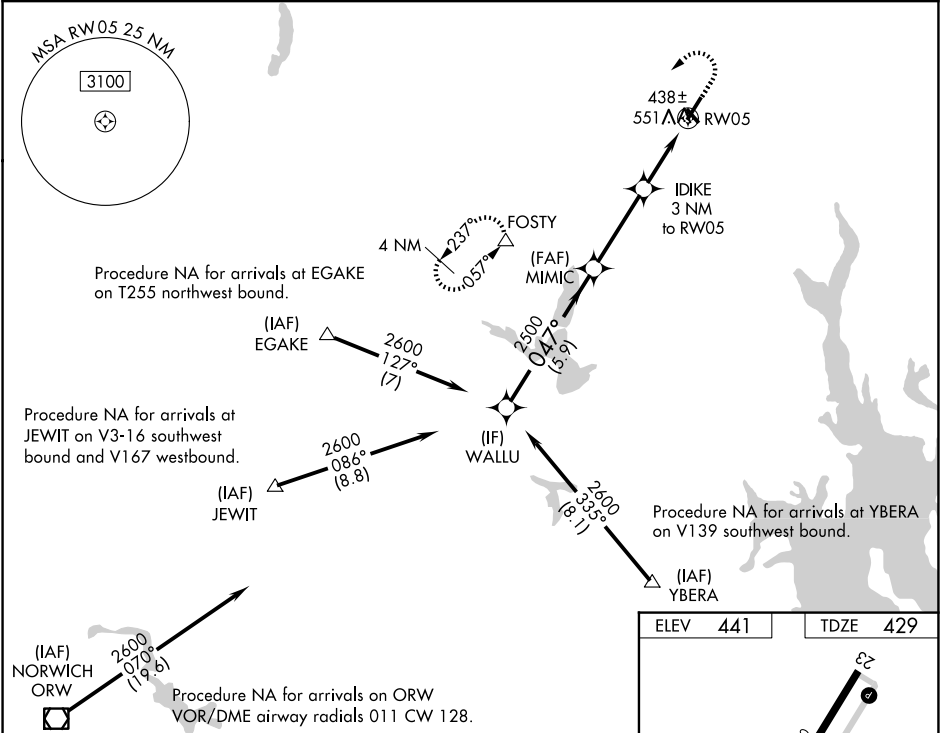

WALLU		MIMIC		IDIKE		FOSTY	
2600		2500		2500		2500	
GP 3.00°		047°		1.1 NM to RW05		1.1 NM to RW05	
TCH 52		2500		*1420		RW05	
5.9 NM		3.4 NM		1.9 NM		1.1	
CATEGORY	A	B	C	D			
LPV DA	700-¾		271 (300-¾)		NA		
LNAV/VNAV DA	835-1		406 (400-1)		NA		
LNAV MDA	820-¾ 391 (400-¾)		820-7/8 391 (400-7/8)		NA		
CIRCLING	900-1 459 (500-1)		900-1½ 459 (500-1½)		NA		

