



APP CRS	Rwy Ldg	7002
107°	TDZE	413
	Apt Elev	413

RNAV (GPS) RWY 12R
ST LOUIS DOWNTOWN (CPS)

RNP APCH - GPS		MISSED APPROACH: Climb to 2200 direct JIXAB and right turn on 125° track to LICKO and hold.		
When local altimeter setting not received, use St Louis Lambert Intl altimeter setting and increase all MDAs 80 feet; increase RNAV Cats B/C/D and Circling Cat C visibility ¼ SM. Circling Rwy 5 NA at night. Rwy 12R helicopter visibility reduction below ¼ SM NA.				
ATIS 121.45	ST LOUIS APP CON 123.7 371.875	DOWNTOWN TOWER ★ 119.925 (CTAF) 0 379.3	GND CON 121.8	UNICOM 122.95

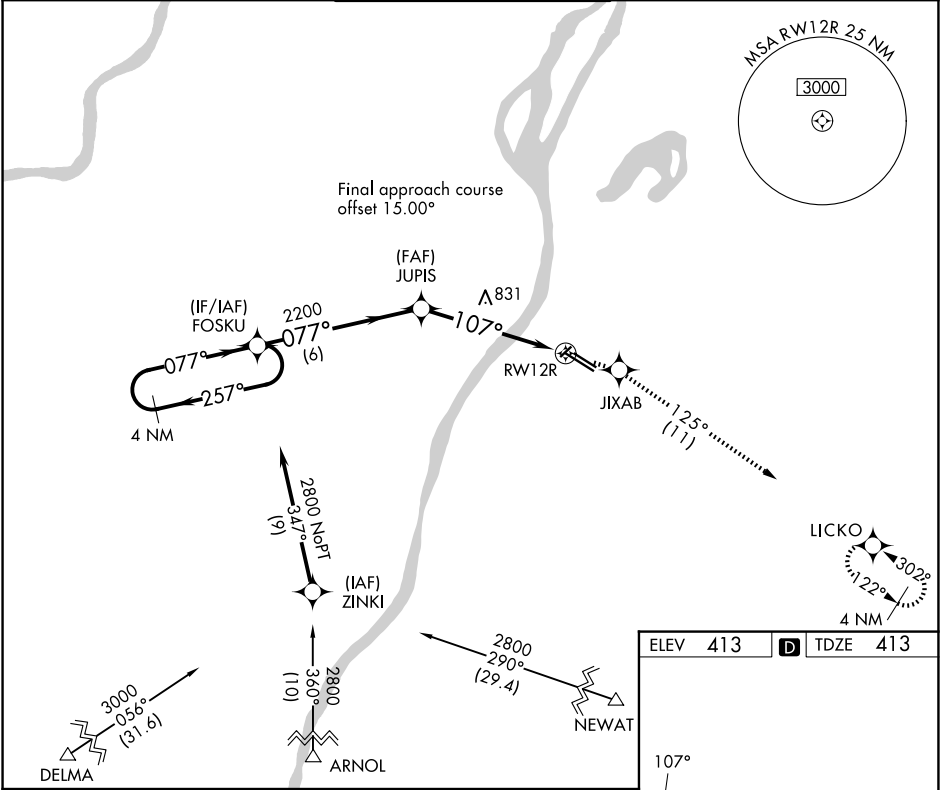

4 NM Holding Pattern		2200	JIXAB	LICKO
2800 ← 257° 077° →		JUPIS	tr 125°	
VDP NA when using St Louis Lambert Intl altimeter setting.		2200	2.1 NM to RW12R	
		3.03° TCH 50		
		6 NM	3.3 NM	2.1 NM
CATEGORY	A	B	C	D
RNAV MDA	1140-1 727 (800-1)		1140-2 727 (800-2)	1140-2¼ 727 (800-2¼)
CIRCLING	1140-1 727 (800-1)		1240-2½ 827 (900-2½)	1380-3 967 (1000-3)

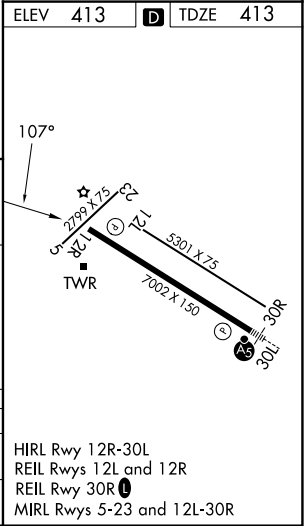

EC-3, 03 SEP 2026 to 01 OCT 2026

EC-3, 03 SEP 2026 to 01 OCT 2026