


WAAS CH 97321 W01A	APP CRS 010°	Rwy Ldg TDZE 626 Apt Elev 638
--	------------------------	---

RNAV (GPS) RWY 1L
TULSA RIVERSIDE (RVS)

RNP APCH - GPS.	⚠ Circling NA northeast of Rwy 31 and 19L. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using TUL altimeter setting. When local altimeter setting not received, use TUL altimeter setting: increase LPV DA to 871 feet; increase LNAV/VNAV DA to 1152 feet and all visibilities ½ SM. Increase all MDAs 40 feet and Circling visibility Cat C ¼ SM.	MISSED APPROACH: Climb to 1100 then climbing left turn to 2600 direct KEVIL and hold.
-----------------	---	---

ATIS 126.5	TULSA APP CON 134.7	RIVERSIDE TOWER ★ 120.3 (CTAF) 0	GND CON 121.7	UNICOM 122.95
----------------------	-------------------------------	---	-------------------------	-------------------------

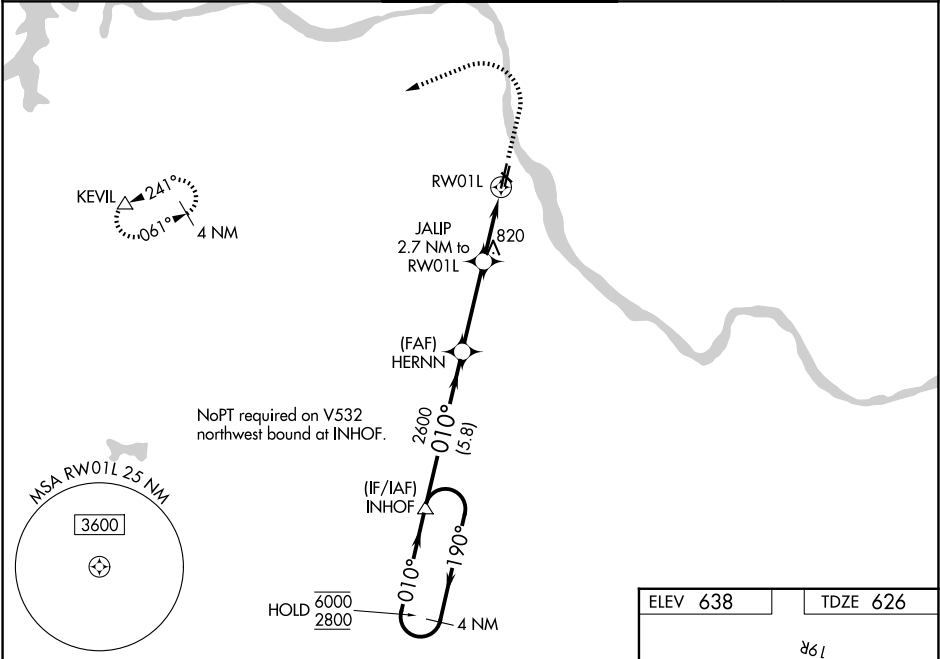

4 NM

Holding Pattern

6000

2800

←190°

→010°

GP 3.00°

TCH 48

INHOF

HERNN

JALIP

RW01L

RW01L

2600

2600

1540

010°

2.7 NM to

1.3 NM to

1100

2600

KEVIL

△


5.8 NM

3.3 NM

1.5 NM

1.3 NM

CATEGORY		A	B	C	D
LPV	DA	845-¾		219 (300-¾)	
LNAV/ VNAV	DA	1126-1⅜		500 (500-1⅜)	
LNAV	MDA	1080-1	454 (500-1)	1080-1⅓	454 (500-1⅓)
CIRCLING		1260-1 622 (700-1)	1280-1 642 (700-1)	1280-1¼ 642 (700-1¼)	1380-2½ 742 (800-2½)

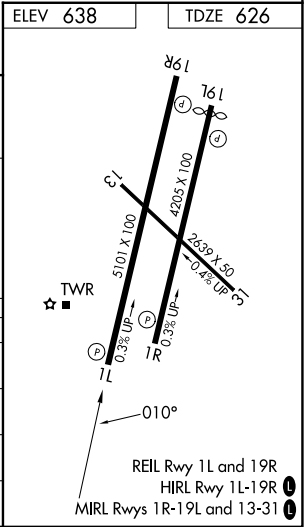

SC-1, 03 SEP 2026 to 01 OCT 2026

SC-1, 03 SEP 2026 to 01 OCT 2026