


WAAS CH 56234 W18A	APP CRS 184°	Rwy Ldg 3800 TDZE 835 Apt Elev 835
--	------------------------	---

RNAV (GPS) RWY 18
DUPONT/LAPEER (D95)

RNP APCH - GPS. ▼ Rwy 18 helicopter visibility reduction below 1 SM NA. Circling NA to Rwys 9 and 27. ▲ When local altimeter setting not received, use FNT altimeter setting and increase all MDAs 60 feet and increase LP Cat C visibility ½ SM, LNAV Cat C and Circling Cat C visibility ¼ SM.	MISSED APPROACH: Climb to 3000 direct ZUSDI and hold.
--	---

AWOS-3P 134.05	GREAT LAKES APP CON ★ 118.8 257.9	UNICOM 123.0 (CTAF) 0
--------------------------	---	---------------------------------

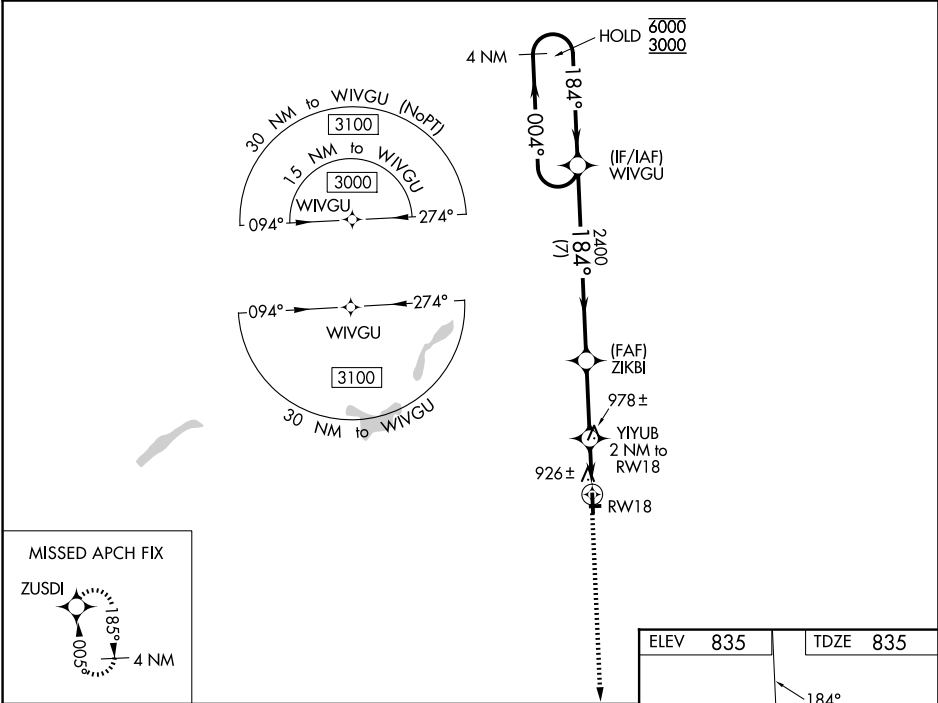

Visual Segment - Obstacles.				
4 NM Holding Pattern WIVGU				
6000 ← 004° 184° → 3000				
ZIKBI 2400				
YIYUB 2 NM to RW18 1500				
RW18				
7 NM 2.8 NM 2 NM				
CATEGORY	A	B	C	D
LP MDA	1180-1 345 (400-1)			NA
LNAV MDA	1240-1	405 (500-1)	1240-1 ½ 405 (500-1 ½)	NA
CIRCLING	1300-1 465 (500-1)	1380-1 545 (600-1)	1460-1 ¾ 625 (700-1 ¾)	NA

