

LOC I-ENW
109.35

APP CRS
068°

Rwy Ldg
6600

TDZE
742

Apt Elev
742

ILS or LOC RWY 7L


KENOSHA RGNL (ENW)

DME required for LOC only. RNAV 1-GPS required.

MALSR

MISSED APPROACH: Climb to 2500 then climbing left turn to 3000 direct DIKHU and hold.

ATIS 127.175	MILWAUKEE APP CON 135.875 317.725	KENOSHA TOWER ★ 118.6 (CTAF) 353.6	GND CON 121.875	UNICOM 122.95
------------------------	---	---	---------------------------	-------------------------

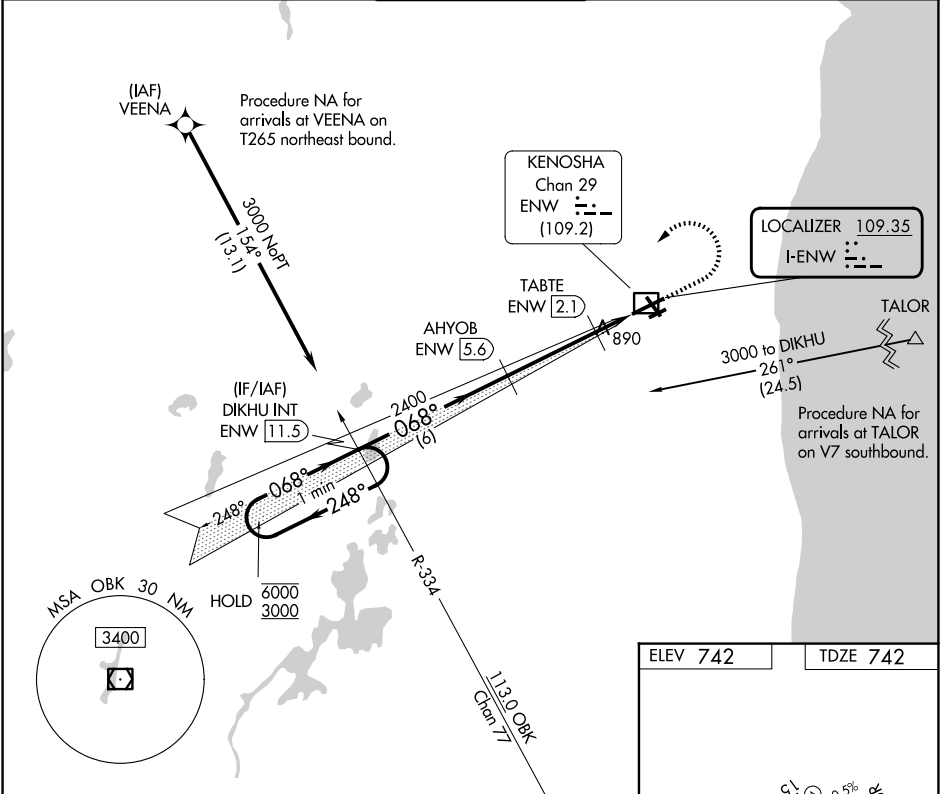

One Minute Holding Pattern

DIKHU INT ENW 11.5

AHYOB ENW 5.6

2500 3000 DIKHU INT

6000 ← 248° → 068° → 3000

GS 3.00° TCH 55

2400

*1280

6 NM 3.5 NM 1.5 NM

*LOC only

CATEGORY	A	B	C	D
S-ILS 7L	942-1/2 200 (200-1/2)			
S-LOC 7L	1140-1/2	398 (400-1/2)	1140-3/4	398 (400-3/4)
CIRCLING	1200-1 458 (500-1)	1340-1 598 (600-1)	1400-1 3/4 658 (700-1 3/4)	1440-2 1/4 698 (700-2 1/4)

ELEV 742 TDZE 742

Diagram of the approach with altitudes and distances: 6000 x 100, 4000 x 75, 3302 x 75, 1500 x 75, 1200 x 75, 900 x 75, 600 x 75, 300 x 75, 150 x 75, 75 x 75.

MIRL Rwy 7R-25L
HIRL Rwys 7L-25R and 15-33
REIL Rwys 15, 25R, and 33

FAF to MAP 5 NM

Knots	60	90	120	150	180
Min:Sec	5:00	3:20	2:30	2:00	1:40