


LOC/DME I-OND 111.55 Chan 52 (Y)	APP CRS 267°	Rwy Ldg TDZE 95 Apt Elev 96	ILS or LOC RWY 26R GEORGE BUSH INT CNTL/HOUSTON (IAH)
--	------------------------	---	---

DME required. From HOOTI: RNAV 1-GPS required. Simultaneous approach authorized with Rwy 26L and Rwy 27. For inop ALS, increase S-ILS 26R Cat E visibility to RVR 4000, and S-LOC 26R Cat C/D/E visibility to 1 3/8 SM.	ALSF-2 	MISSED APPROACH: Climb to 600 then climbing right turn to 3000 on IAH VORTAC R-344 to PEPBI INT/IAH 20 DME and hold.
--	------------	--

D-ATIS 124.05	HOUSTON APP CON 120.05 379.1 E 124.35 316.15 W	HOUSTON TOWER 120.725 290.2	GND CON 118.575
-------------------------	--	---------------------------------------	---------------------------

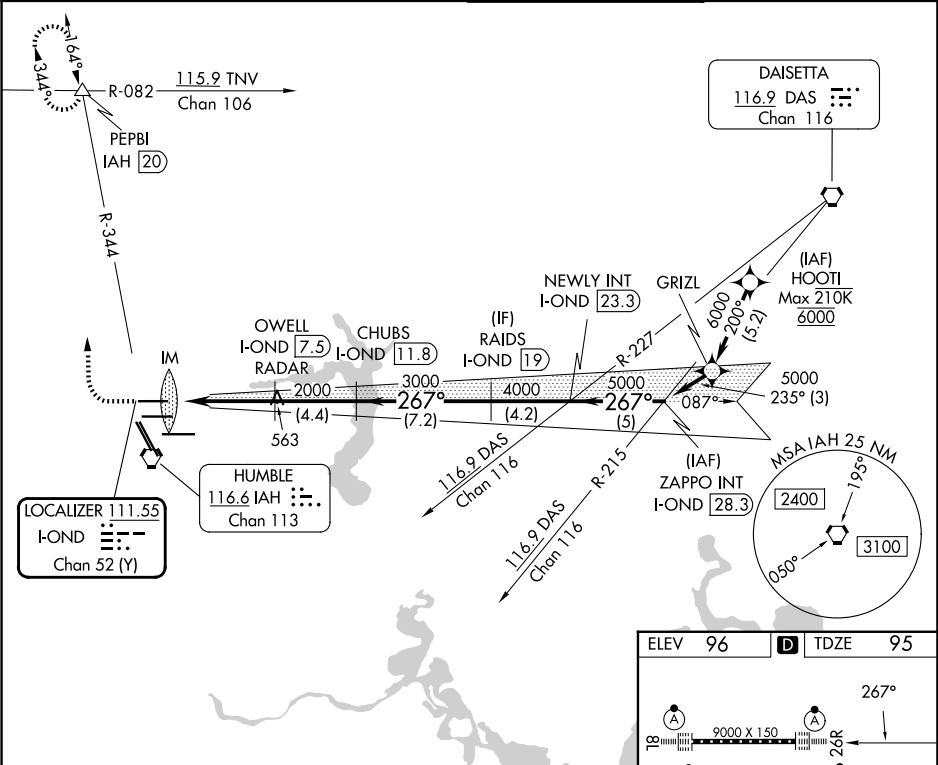

600 ↑	3000 ↗ IAH R-344	PEPBI △	OWELL I-OND 7.5 RADAR CHUBS I-OND 11.8 RAIDS I-OND 19 NEWLY INT I-OND 23.3 ZAPPO INT I-OND 28.3				
* LOC only			IM I-OND 1.7 *I-OND 2.9 2000 267°5000 GS 3.00° TCH 59				
0.1 1.1 4.6 NM 4.4 NM 7.2 NM 4.2 NM 5 NM							
CATEGORY			A B C D E				
S-ILS 26R			295/18 200 (200-½)				
S-LOC 26R			580/24 485 (500-½) 580/50 485 (500-1)				

SC-5

03 SEP 2026 to 01 OCT 2026

9402 X 150

26L

26R

1000 X 150

1000 X 50

1000 X 150

33L

33R

TWR

9402 X 150

26L

26R

33L

33R

TDZ/CL Rwys 8R, 8L, 15R, 26R, 26L, 27 and 33L

HIRL all Rwys

FAF to MAP 5.8 NM					
Knots	60	90	120	150	180
Min:Sec	5:48	3:52	2:54	2:19	1:56