

|           |         |          |      |
|-----------|---------|----------|------|
| LOC I-TVN | APP CRS | Rwy Ldg  | 9801 |
| 111.9     | 185°    | TDZE     | 609  |
|           |         | Apt Elev | 629  |

ILS or LOC RWY 18L  
HUNTSVILLE INTL-CARL T JONES FLD (HSV)



**Simultaneous approach authorized. Circling NA for Cat C/D/E east of Rwy 18L-36R. For inop ALS, increase S-ILS 18L Cat E visibility to RVR 4000 and S-LOC 18L Cat E visibility to 1 3/4 SM; FEKSO Fix minimums increase S-LOC 18L Cat E visibility to RVR 6000.**

**\* RVR 1800 authorized with use of FD or AP or HUD to DA.**


**MALSR**

**MISSED APPROACH:** Climb to 2500 then climbing left turn to 4000 on heading 160° and VUZ R-011 to FEWER INT/VUZ 39.4 DME and hold.

|        |                     |                       |               |        |
|--------|---------------------|-----------------------|---------------|--------|
| ATIS   | HUNTSVILLE APP CON* | HUNTSVILLE TOWER*     | GND CON       | UNICOM |
| 121.25 | 125.6 354.1         | 127.6 (CTAF) 0 350.35 | 121.9 269.525 | 122.95 |

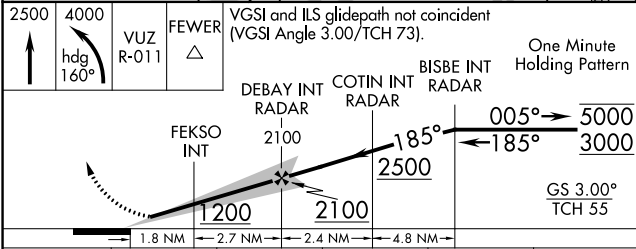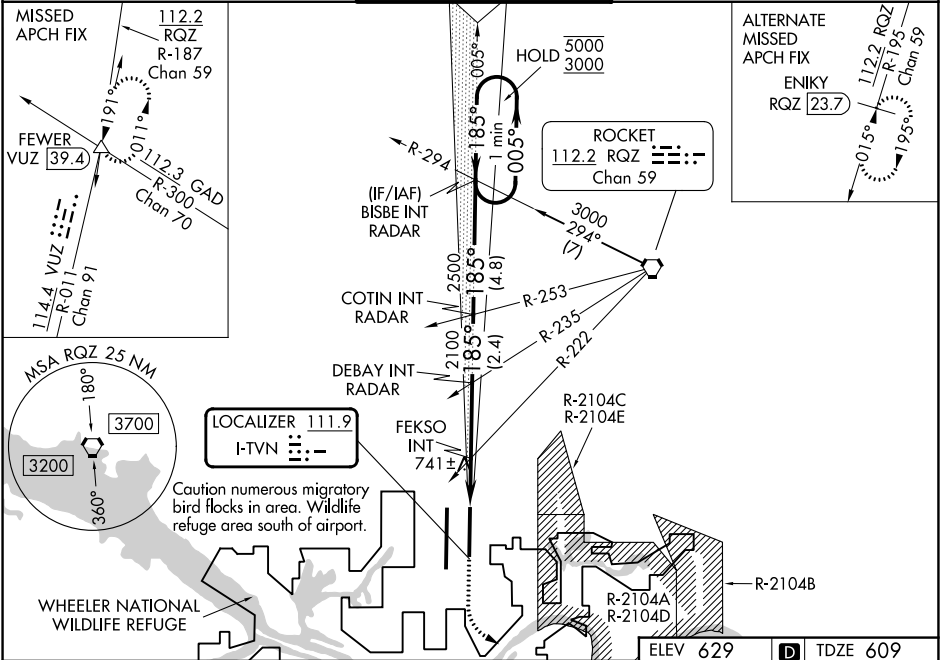

| CATEGORY                                         | A                    | B             | C               | D               | E               |
|--------------------------------------------------|----------------------|---------------|-----------------|-----------------|-----------------|
| S-ILS 18L*                                       | 809/24 200 (200-1/2) |               |                 |                 |                 |
| S-LOC 18L                                        | 1200/24              | 591 (600-1/2) | 1200-1 3/4      | 591 (600-1 3/4) |                 |
| CIRCLING                                         | 1200-1               | 571 (600-1)   | 1200-1 3/4      | 1240-2          | 1260-2 1/4      |
|                                                  |                      |               | 571 (600-1 3/4) | 611 (700-2)     | 631 (700-2 1/4) |
| FEKSO FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED) |                      |               |                 |                 |                 |
| S-LOC 18L                                        | 1000/24              | 391 (400-1/2) | 1000/35         | 391 (400-1/2)   |                 |
| CIRCLING                                         | 1160-1               | 531 (600-1)   | 1160-1 1/2      | 1240-2          | 1260-2 1/4      |
|                                                  |                      |               | 531 (600-1 1/2) | 611 (700-2)     | 631 (700-2 1/4) |

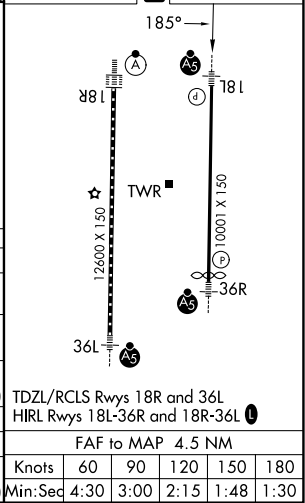

SE-4, 03 SEP 2026 to 01 OCT 2026

SE-4, 03 SEP 2026 to 01 OCT 2026