

WAAS  
CH **70534**  
**W27A**

APP CRS  
**274°**

Rwy Idg  
TDZE **1146**  
Apt Elev **1150**

**RNAV (GPS) RWY 27**

ROSCOMMON COUNTY/BLODGETT MEML (HTL)


When local altimeter setting not received, use Gaylord altimeter setting and increase all MDAs 120 feet and visibility Cat C/D ½ SM. DME/DME RNP-0.3 NA. Procedure NA at night.

Helicopter visibility reduction below 1 SM NA. Circling NA to Rwy's 18, 36.

MISSED APPROACH:

Climb to 3300 direct FISTU and hold.

|                       |                                             |                                 |
|-----------------------|---------------------------------------------|---------------------------------|
| ASOS<br><b>118.05</b> | MINNEAPOLIS CENTER<br><b>125.475 269.45</b> | UNICOM<br><b>122.8 (CTAF) 0</b> |
|-----------------------|---------------------------------------------|---------------------------------|

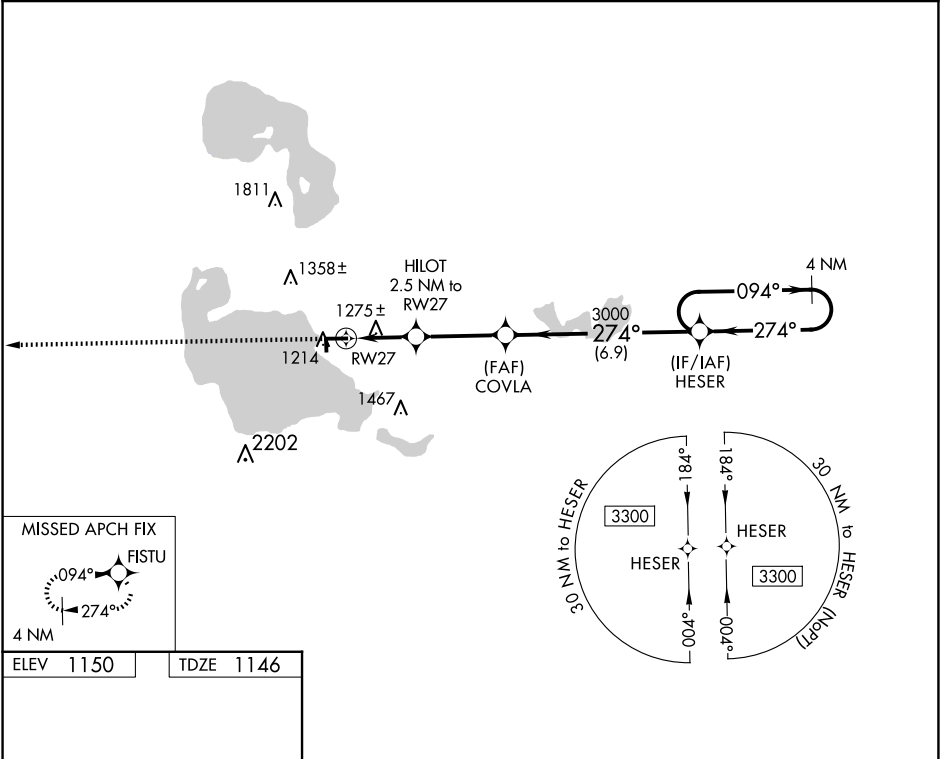

|                            |        |             |              |
|----------------------------|--------|-------------|--------------|
| ELEV 1150                  |        | TDZE 1146   |              |
| 3300                       |        | FISTU       |              |
| Visual Segment - Obstacles |        | HESER       |              |
| RW27                       |        | COVLA       |              |
| 2.5 NM                     |        | 3.2 NM      |              |
| 1980                       |        | 3000        |              |
| 2.5 NM                     |        | 6.9 NM      |              |
| CATEGORY                   | A      | B           | C            |
| LP MDA                     | 1540-1 | 394 (400-1) | 1540-1¼      |
| LNAV MDA                   | 1560-1 | 414 (500-1) | 1560-1¼      |
| CIRCLING                   | 1600-1 | 450 (500-1) | 1700-1½      |
|                            |        |             | 550 (600-1½) |
|                            |        |             | 1820-2       |
|                            |        |             | 670 (700-2)  |