

WAAS CH 97525 W31A	APP CRS 313°	Rwy Ldg TDZE 725 Apt Elev 727
--	------------------------	---

RNAV (GPS) RWY 31

VIRGIL I GRISSOM MUNI (BFR)


RNP APCH - GPS.

▼

When local altimeter setting not received, use BMG altimeter setting and increase all MDAs 80 feet and LNAV visibility Cat C/D ¼ SM, and LP visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ¼ SM. Procedure NA at night. Rwy 31 helicopter visibility reduction below 1 SM NA.

MISSED APPROACH:
Climb to 2500 direct
KOXVU and hold.

AWOS-3PT 119.125	LOUISVILLE APP CON 123.675 327.0	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

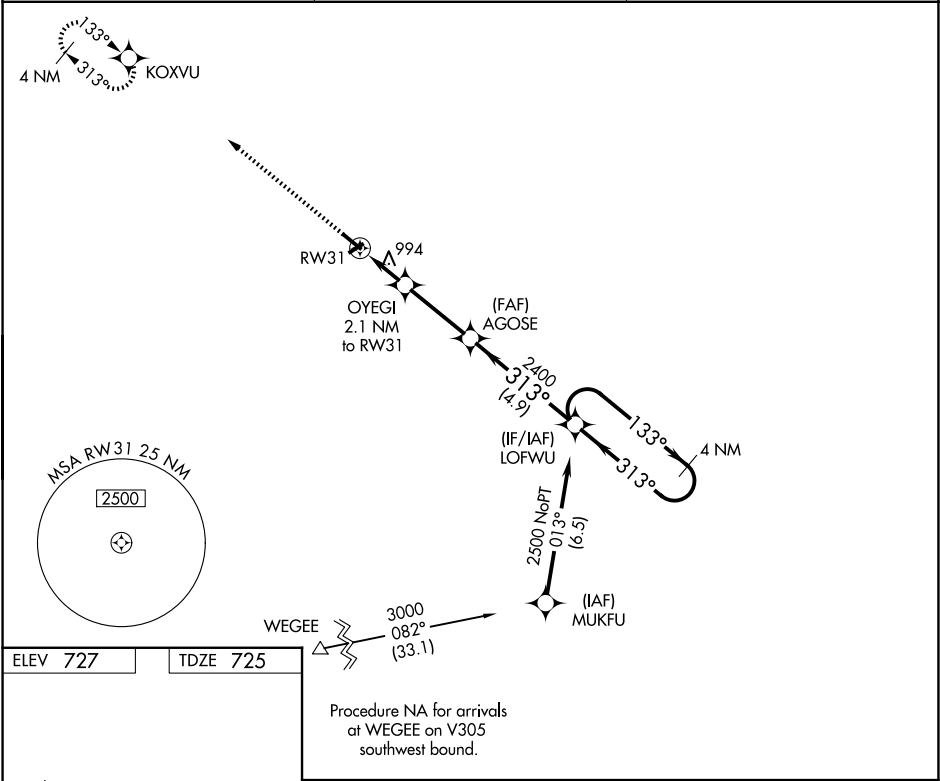

ELEV 727 TDZE 725		Visual Segment - Obstacles.		4 NM Holding Pattern	
CATEGORY	A	B	C	D	
LP MDA	1260-1	535 (600-1)	1260-1½	535 (600-1½)	
LNAV MDA	1260-1	535 (600-1)	1260-1½	535 (600-1½)	
CIRCLING	1300-1	573 (600-1)	1380-1¾ 653 (700-1¾)	1380-2 653 (700-2)	

EC-2, 03 SEP 2026 to 01 OCT 2026

EC-2, 03 SEP 2026 to 01 OCT 2026