

WAAS CH 86311 W28A	APP CRS 282°	Rwy Ldg 5499 TDZE 911 Apt Elev 914
--	------------------------	---

RNAV (GPS) RWY 28

GENESEE COUNTY (GVQ)

RNP APCH - GPS.


T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use ROC altimeter setting; increase LPV DA to 1263 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 1466 feet and all visibilities ½ SM; increase all MDAs 120 feet and LNAV visibility Cat C ¾ SM and Circling visibility Cat C/D ½ SM. Baro-VNAV and VDP NA when using ROC altimeter setting. Inop table does not apply to LNAV Cat D. For inop ALS, increase LNAV Cat C visibility to 1 SM.

MALSR



MISSED APPROACH: Climb to 3300 direct WAVRU and left turn via 162° track to YAVUD and left turn via 063° track to POCZI and hold.

AWOS-3PT 127.525	ROCHESTER APP CON 123.7 322.3	CLNC DEL 121.8	UNICOM 122.7 (CTAF) 0
----------------------------	---	--------------------------	---------------------------------

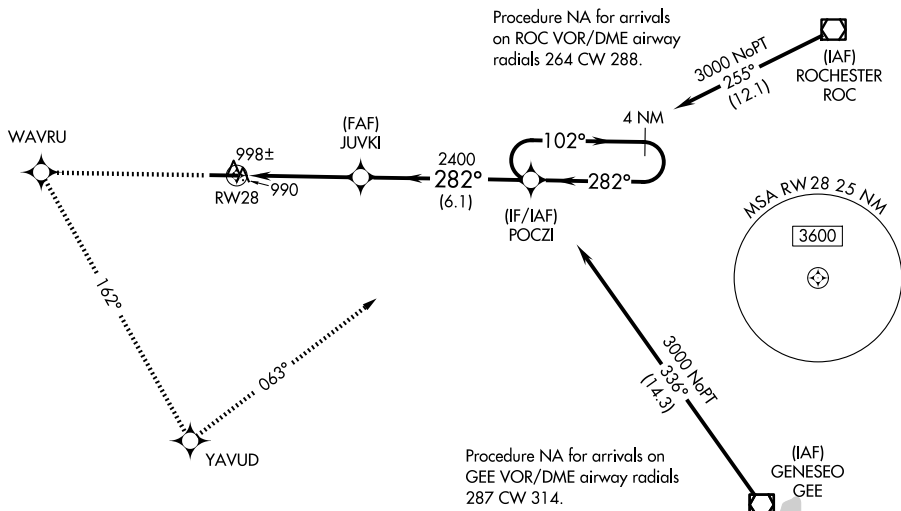

ELEV 914		TDZE 911
----------	--	----------



RNAV (GPS) RWY 28