

RNP APCH - GPS.

▽



⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 7⁄8 SM and LNAV Cats C/D visibility to 1 1⁄8 SM.

MALSR

MISSED APPROACH: Climb to 700 then climbing left turn to 3100 direct CLEEP and hold.

ATIS 118.325	HOUSTON APP CON 119.7 281.4	CONROE TOWER ★ 124.125 (CTAF) 0	GND CON 120.45
-----------------	--------------------------------	------------------------------------	-------------------

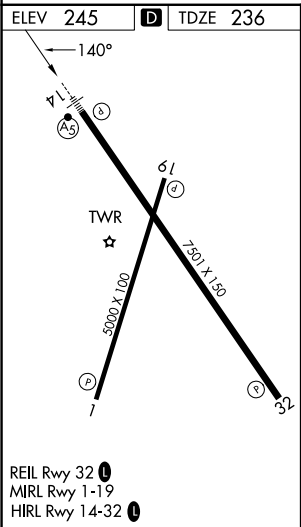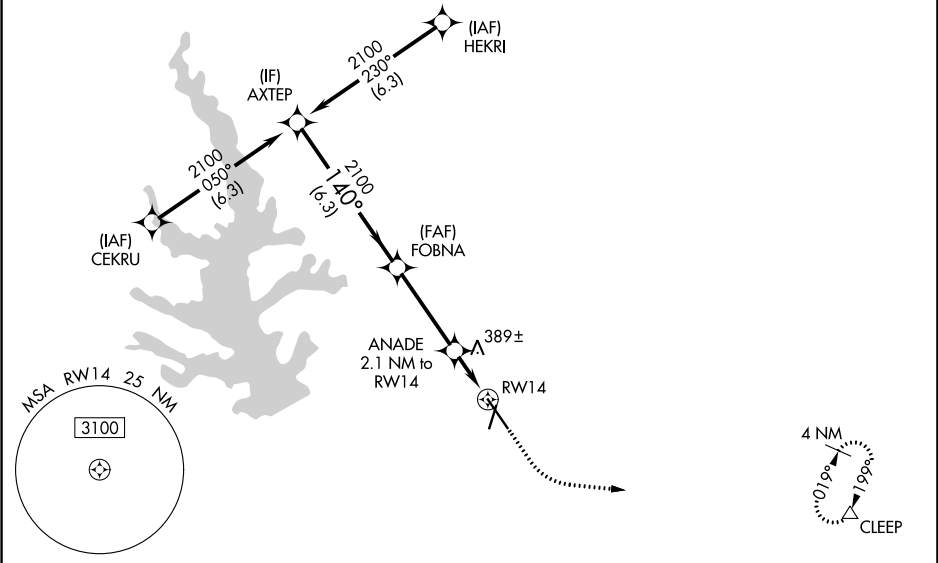

	AXTEP	FOBNA	ANADE	
	2100	2100	2100	
	GP 3.00°			
	TCH 47			
	6.3 NM	3.6 NM	1.1 NM	1.1 NM
CATEGORY	A	B	C	D
LPV DA	436-1⁄2	200 (200-1⁄2)		
LNAV/VNAV DA	521-1⁄2	285 (300-1⁄2)		
LNAV MDA	640-1⁄2	404 (400-1⁄2)	640-3⁄4	404 (400-3⁄4)
CIRCLING	700-1	455 (500-1)	880-1 3⁄4	960-2 1⁄4
			635 (700-1 3⁄4)	715 (800-2 1⁄4)