RNAV (GPS) RWY 2

COLUMBIA RGNL (COU)

WAAS	APP CRS	Rwy Ldg	7401
CH 77599	021°	TDZE	889
W02A		Apt Elev	889

RNP APCH - GPS.

T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4000, and increase LNAV Cat C/D visibility to RVR 5500. Circling NA for Cat D west of Rwy 2 and 13.
* RVR 1800 authorized with the use of FD or AP or HUD to DA.

MALSR (A5)

MISSED APPROACH: Climb to 3100 direct AGVOY and hold.

ATIS	MIZZU APP CON	COLUMBIA TOWER *	GND CON	UNICOM
128.45	124.375 353.925	119.3 (CTAF) L 363.25	121.6	122.95

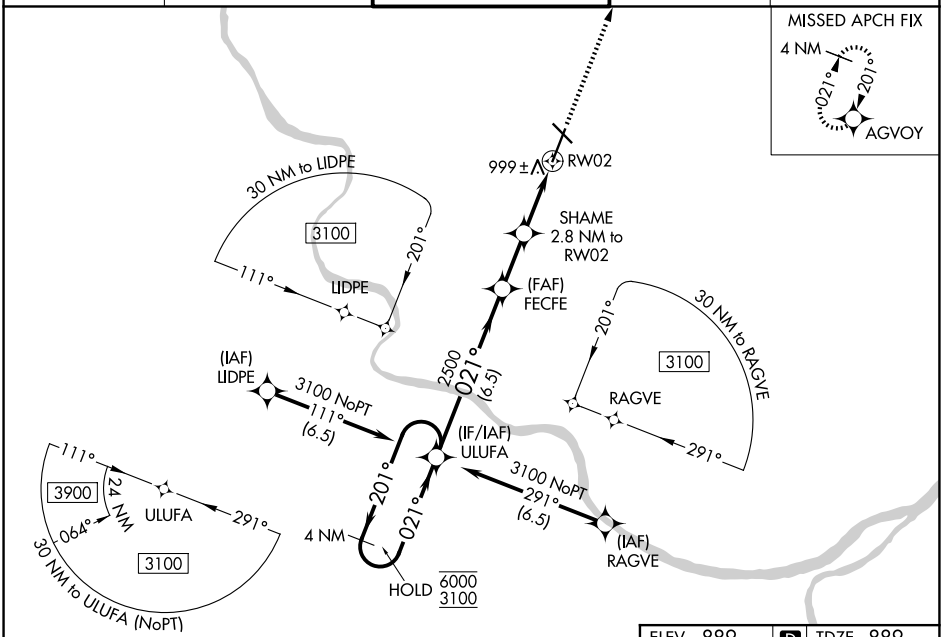

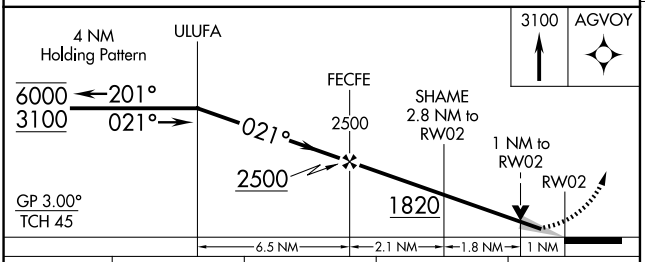

CATEGORY	A	B	C	D
LPV DA*	1089/24 200 (200-½)			
LNAV/VNAV DA	1143/24 254 (300-½)			
LNAV MDA	1260/24 371 (400-½)		1260/35 371 (400-⅝)	
CIRCLING	1300-1 411 (500-1)	1340-1 451 (500-1)	1360-1½ 471 (500-1½)	1440-2 551 (600-2)

ELEV 889 D TDZE 889

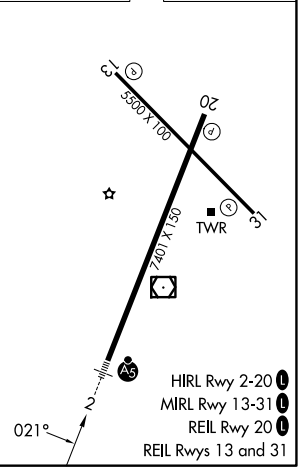

NC-3, 03 SEP 2026 to 01 OCT 2026
NC-3, 03 SEP 2026 to 01 OCT 2026