



WAAS CH 40427 W25A	APP CRS 253°	Rwy Ldg TDZE 730 Apt Elev 730
--	------------------------	---

RNAV (GPS) RWY 25

WILLIAMS COUNTY (ØG6)

▼ Δ NA When VGSI inop, Straight-in/Circling Rwy 25 procedure NA at night. DME/DME RNP-0.3 NA. Helicopter visibility reduction below 1 SM NA. Use Defiance Meml altimeter setting; when not received, use Auburn/Dekalb Exec altimeter setting: increase all MDAs 60 feet and LP and LNAV and Circling visibility Cats C/D ¼ SM.	MISSED APPROACH: Climb to 3000 direct POKLY and hold.
--	---

DFI ASOS 121.425	TOLEDO APP CON 134.35 307.0	UNICOM 122.8 (CTAF)	123.0
----------------------------	---------------------------------------	-------------------------------	--------------

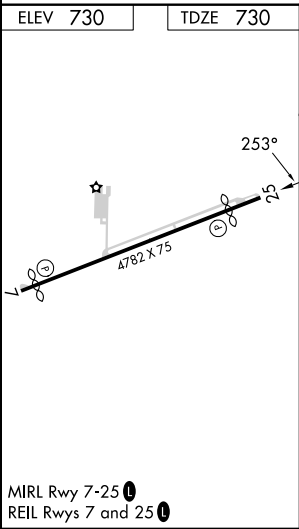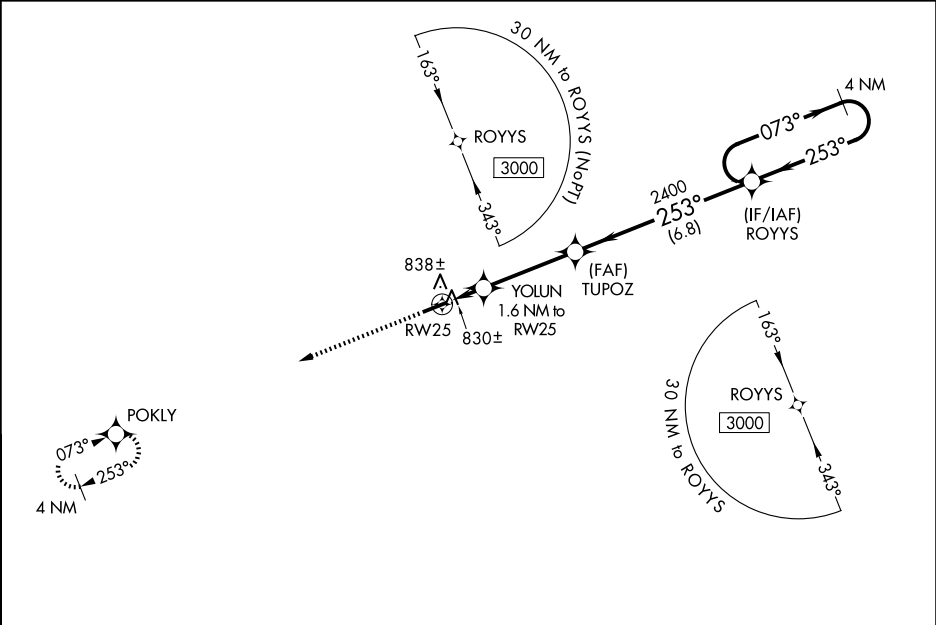

	3000	POKLY				4 NM Holding Pattern
			YOLUN 1.6 NM to RW25	TUPOZ		ROYYs
				2400		073° → 3000
				1260		← 253°
				3.00° TCH 35		
				1.6 NM	3.5 NM	6.8 NM
CATEGORY	A	B	C	D		
LP MDA	1120-1	390 (400-1)	1120-1½	390 (400-1½)		
LNAV MDA	1140-1	410 (500-1)	1140-1½	410 (500-1½)		
CIRCLING	1300-1	570 (600-1)	1300-1½	1520-2½		
			570 (600-1½)	790 (800-2½)		