


WAAS CH 58027 W19A	APP CRS 187°	Rwy Ldg TDZE 2687 Apt Elev 2694
--	------------------------	---

RNAV (GPS) RWY 19
TWIN COUNTY (HLX)

RNP APCH - GPS. ▼ Rwy 19 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use PSK altimeter setting and increase all MDAs 140 feet, increase LP and LNAV visibilities Cats C and D ¾ SM, and Circling Cat C ¼ SM. VDP NA with PSK altimeter setting.	MISSED APPROACH: Climb to 3200 then climbing left turn to 5000 direct EVMEH and hold.
--	---

AWOS-3 118.375	ROANOKE APP CON 126.0 339.8	UNICOM 122.8 (CTAF) 0
--------------------------	---------------------------------------	---------------------------------

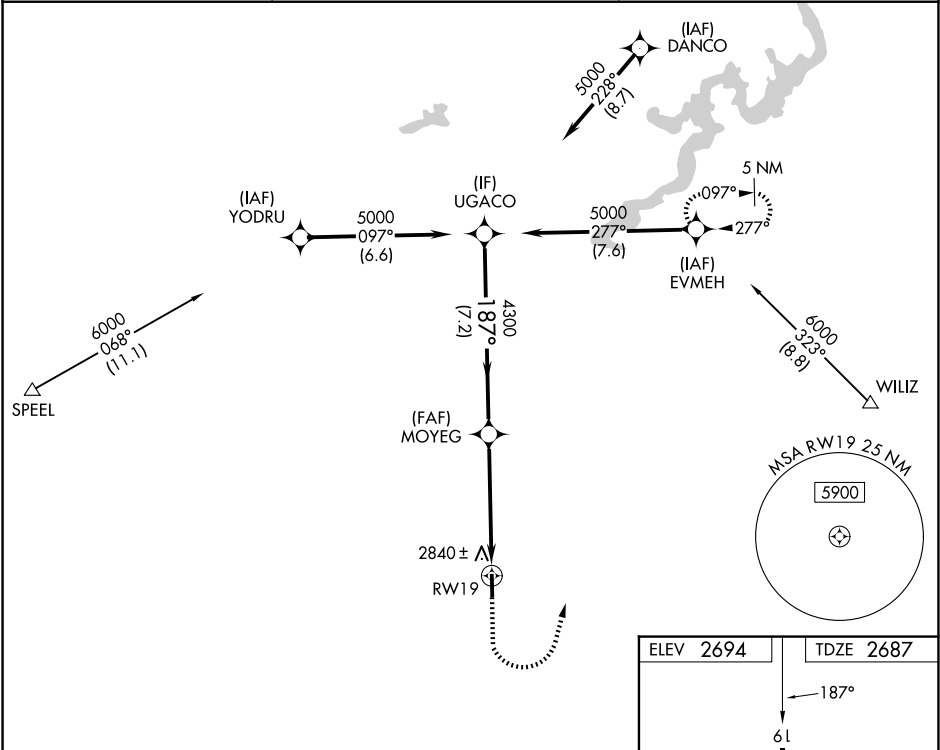

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 36).				3200	5000	EVMEH
UGACO				MOYEG		
5000				4300		
187°				3.00°		
7.2 NM				3.7 NM		
1.4 NM to RWY 19				RWY 19		
TCH 40				1.4		
CATEGORY	A	B	C	D		
LP MDA	3120-1	433 (500-1)	3120-1¼	433 (500-1¼)		
LNAV MDA	3140-1	453 (500-1)	3140-1⅜	453 (500-1⅜)		
CIRCLING	3200-1	506 (600-1)	3200-1½	3680-3		
			506 (600-1½)	986 (1000-3)		

