

WAAS
CH **70441**
W11A

APP CRS
115°


Rwy Ldg **4099**
TDZE **790**
Apt Elev **790**

RNAV (GPS) RWY 11
GEORGETOWN EXEC (GTU)

RNP APCH:
▼ Rwy 11 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Skylark Field altimeter setting and increase all MDA 80 feet. Increase LP and Circling Cat C/D visibility ¼ SM and LNAV Cat C/D visibility ⅓ SM. VDP NA when using Skylark Field altimeter setting.
▲

MISSED APPROACH:
Climbing left turn to 3000 direct DARTE and hold.

ATIS 118.6	AUSTIN APP CON 119.0 370.85	GEORGETOWN TOWER ★ 120.225 (CTAF) 0	GND CON 119.125	UNICOM 123.0
----------------------	---------------------------------------	---	---------------------------	------------------------

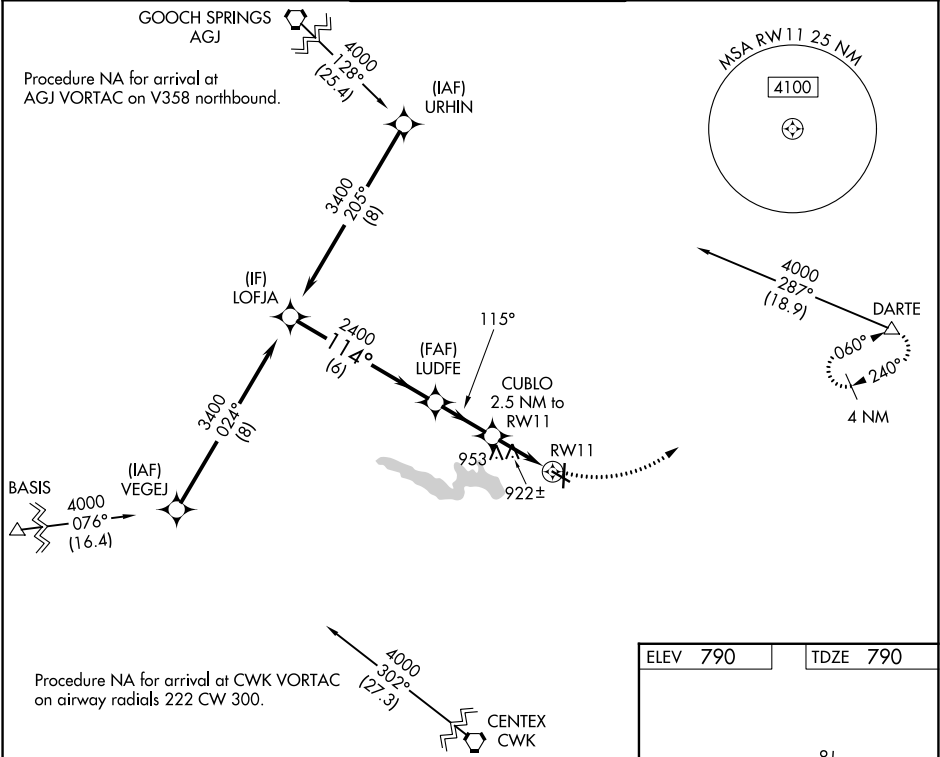

LOFJA

3400

114°

LUDFE

2400

115°

CUBLO

1620

3.04° TCH 40

1.1 NM to RW11

6 NM

2.4 NM

1.4

1.1

ELEV 790

TDZE 790

3000

DARTE

115°

81

4099 X 75

0.8% UP

0.7% UP

36

TWR

CATEGORY	A	B	C	D
LP MDA	1180-1	390 (400-1)	1180-1½	390 (400-1½)
LNAV MDA	1220-1	430 (500-1)	1220-1¼	430 (500-1¼)
CIRCLING	1240-1 450 (500-1)	1340-1 550 (600-1)	1360-1½ 570 (600-1½)	1640-2¾ 850 (900-2¾)

REIL Rwy 18 and 36 0
MRL Rwy 11-29 and 18-36 0