

WAAS CH 78220 W12A	APP CRS 117°	Rwy Idg TDZE Apt Elev	3449 940 940
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 12

M GRAHAM CLARK DOWNTOWN (PLK)

Baro-VNAV NA when using Branson altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. VDP NA with Branson altimeter setting. Obtain local altimeter setting on CTAF; when not received, use Branson altimeter setting and increase all DA 65 feet and all MDA 80 feet; increase LPV all Cats visibility 1/8 mile and LNAV/VNAV all Cats visibility 1/4 mile.

MISSED APPROACH:
Climb to 3200 direct UZAPO and hold.

SPRINGFIELD APP CON 126.35	UNICOM 122.7 (CTAF) 0
--------------------------------------	---------------------------------

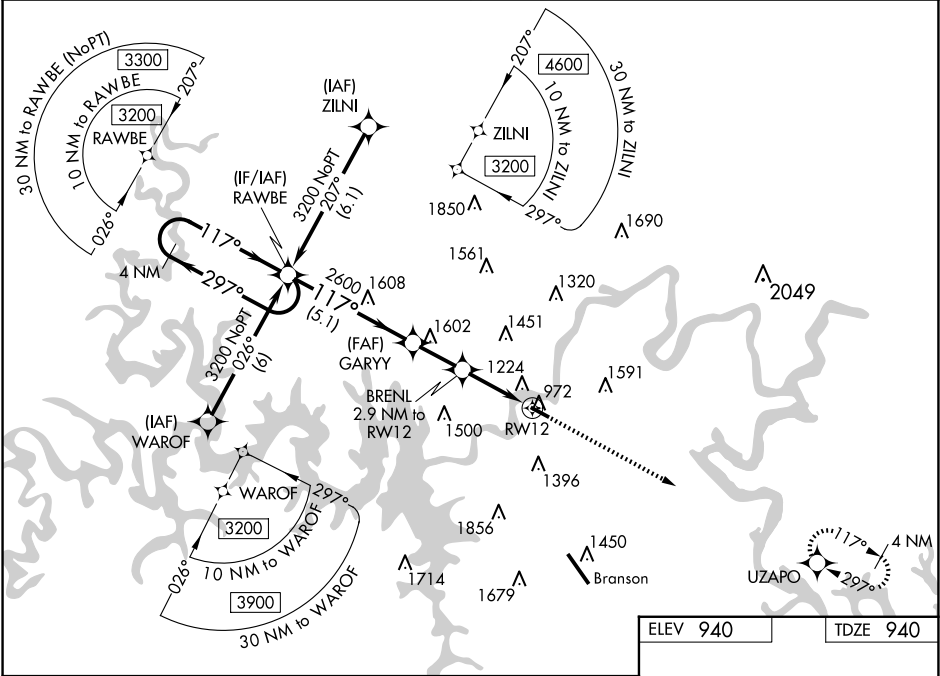

4 NM

Holding Pattern

RAWBE

*LNAV only

3200

↑

UZAPO

✧

3200

←297°

117°→

GP 3.10°

TCH 40

GARYY

2600

BRENL

2.9 NM to RW12

*1.7 NM to RW12

RW12

*1920

2600

5.1 NM

2 NM

1.2

1.7 NM

CATEGORY	A	B	C	D
LPV DA	1140-¾	200 (200-¾)	NA	
LNAV/VNAV DA	1416-1⅝	476 (500-1⅝)	NA	
LNAV MDA	1540-1	600 (600-1)	NA	
CIRCLING	1560-1	620 (700-1)	NA	

ELEV 940	TDZE 940
REIL Rwy 12 and 30 0	
MIRL Rwy 12-30 0	

NC-3, 03 SEP 2026 to 01 OCT 2026

NC-3, 03 SEP 2026 to 01 OCT 2026