

WAAS CH 48919 W09A	APP CRS 091°	Rwy Ldg 6002 TDZE 13 Apt Elev 13
--	------------------------	---

RNAV (GPS) RWY 9
FORT LAUDERDALE EXEC (FXE)


T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 4°C (40°F) or above 54°C (130°F). When local altimeter setting not received, use Fort Lauderdale/Hollywood
A Intl altimeter setting and increase LPV DA to 231; LNAV/VNAV DA to 445. Increase all MDA 20 feet, increase LNAV/VNAV all Cats visibility to 1. Baro-VNAV and VDP NA when using Fort Lauderdale/Hollywood Intl altimeter setting. DME/DME RNP-0.3 NA.

MALSR



MISSED APPROACH:
Climb to 2000 direct
FORSU and hold.

ATIS 119.85	MIAMI APP CON 119.7 306.3	EXECUTIVE TOWER 120.9 239.3	GND CON 121.75
----------------	------------------------------	--------------------------------	-------------------

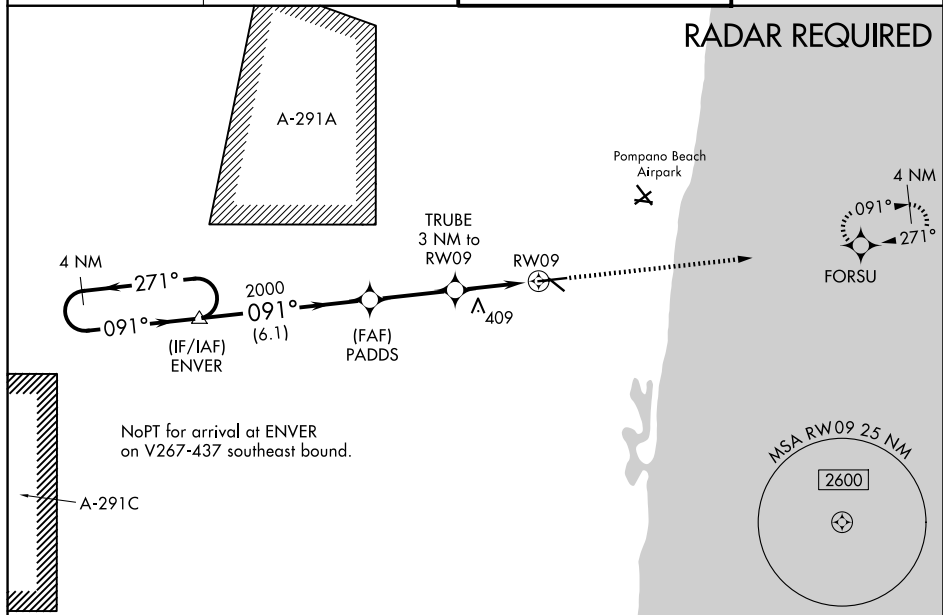

ELEV 13		TDZE 13
---------	--	---------

