

WAAS CH 42904 W16A	APP CRS 159°	Rwy Ldg TDZE 207 Apt Elev 207	RNAV (GPS) RWY 16 HANOVER COUNTY MUNI (OFP)
--	------------------------	---	---

RNP APCH - GPS.



▼

▲

When local altimeter setting not received, use RIC altimeter setting: increase LPV DA to 571 feet; increase LNAV/VNAV DA to 600 feet; increase all MDAs 40 feet and LNAV visibility Cat C 1/8 SM. Baro-VNAV NA when using RIC altimeter setting. For uncompensated Baro-VNAV systems LNAV/VNAV NA below -15°C or above 54°C. Rwy 16 helicopter visibility reduction below 3/4 SM NA.

MISSED APPROACH:
Climb to 2000 direct BOCA and left turn via 059° track to CALMI and left turn via 324° track to ISSIG and hold.

ASOS 119.025	POTOMAC APP CON (001°-185°) 126.4 307.2 (186°-360°) 126.75 307.2	CLNC DEL 125.4	UNICOM 122.7 (CTAF) 0
------------------------	--	--------------------------	---------------------------------

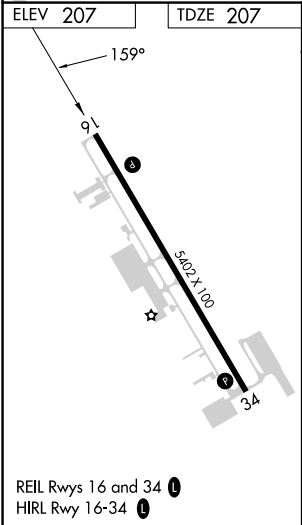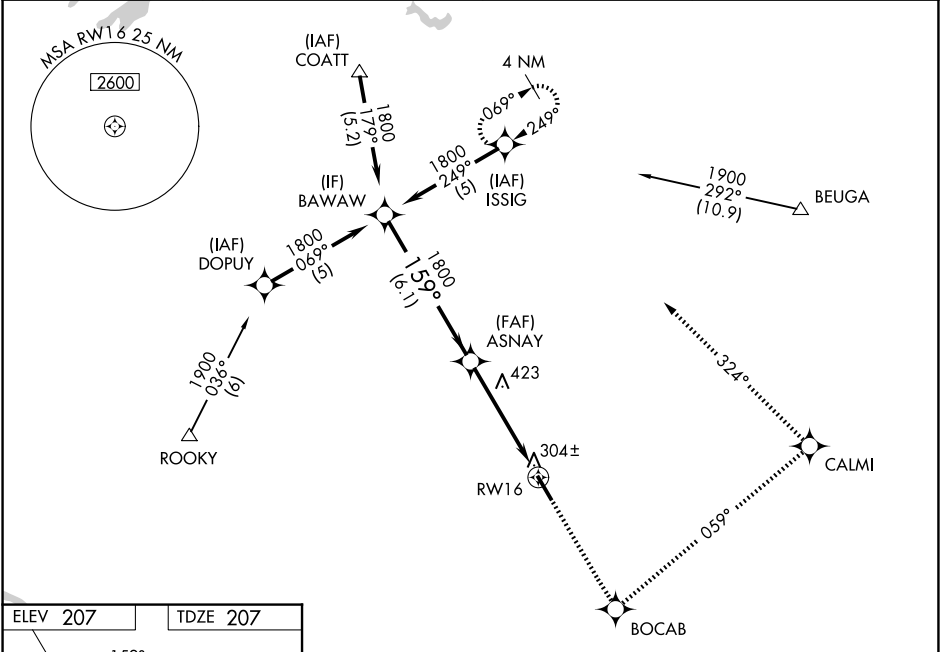

BAWAW		2000 ↑		BOCAB ✧		tr 059° 		CALMI ✧		tr 324° 		ISSIG ✧	
Procedure Turn NA		ASNAY ✕											
1800		159°		1800		RW16							
GP 3.00° TCH 40		6.1 NM		4.8 NM									
CATEGORY	A		B		C		D						
LPV DA	535-1 ¼ 328 (400-1 ¼)												
LNAV/ VNAV DA	564-1 ¼ 357 (400-1 ¼)												
LNAV MDA	700-1 493 (500-1)				700-1 ⅜ 493 (500-1 ⅜)				700-1 ½ 493 (500-1 ½)				
CIRCLING	700-1 493 (500-1)				900-2 693 (700-2)				1020-2 ¾ 813 (900-2 ¾)				