

WAAS CH 70348 W18A	APP CRS 180°	Rwy Ldg TDZE 1326 Apt Elev 1326
--	------------------------	---

RNAV (GPS) RWY 18

AUGUSTA MUNI (3AU)

RNP APCH - GPS.	MISSED APPROACH: Climb to 3000 direct WAKOP and hold.
⚠ Rwy 18 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Baro-VNAV and VDP NA when using AAO altimeter setting. When local altimeter setting not received, use AAO altimeter setting and increase LPV DA to 1624 feet; increase LNAV/VNAV DA to 1742 feet; increase all MDAs 40 feet and LNAV visibility Cat C ½ SM.	

AWOS-3P 124.175	WICHITA APP CON 134.8 269.1	CLNC DEL 125.0	UNICOM 122.8 (CTAF) 0
---------------------------	---------------------------------------	--------------------------	---------------------------------

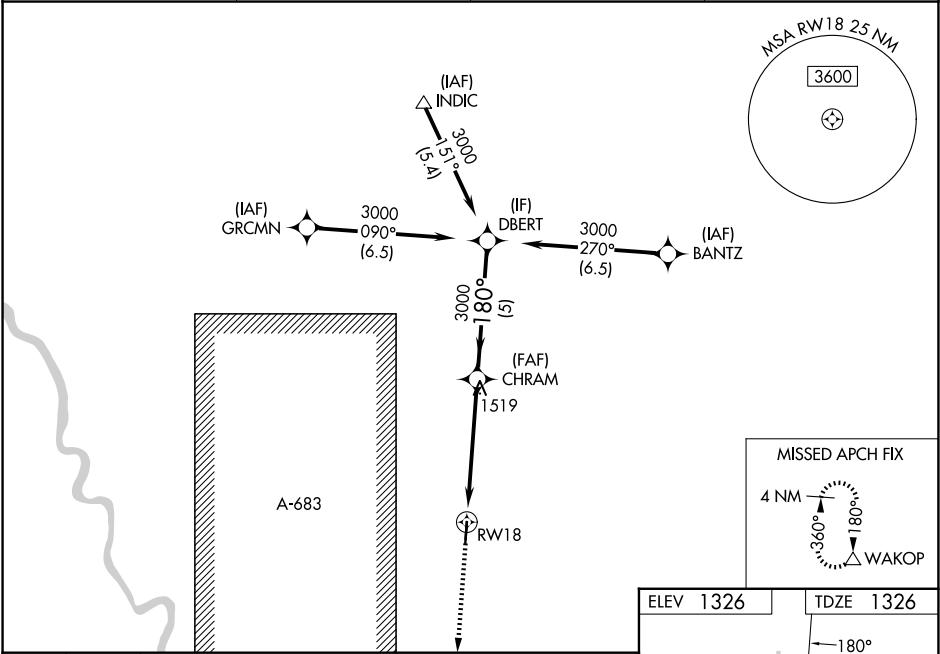


Diagram illustrating the approach path for RWY 18. The path is a straight line with a 180° turn at the intersection of the 3.9 NM and 5 NM segments. The intersection point is marked with a cross and labeled 'CHRAM'. The path is labeled 'RWY 18' and '1.2 NM to RWY 18'. The intersection point is also labeled '3000' and '180°'. The path is labeled 'GP 3.00° TCH 40'.

CATEGORY	A	B	C	D
LPV DA	1591-1 265 (300-1)			NA
LNAV/VNAV DA	1709-1½ 383 (400-1½)			NA
LNAV MDA	1760-1 434 (500-1)		1760-1¼ 434 (500-1¼)	NA
CIRCLING	1800-1 474 (500-1)	1820-1 494 (500-1)	1820-1½ 494 (500-1½)	NA

