

|                                        |                        |                                                     |
|----------------------------------------|------------------------|-----------------------------------------------------|
| WAAS<br>CH <b>63027</b><br><b>W36A</b> | APP CRS<br><b>360°</b> | Rwy Ldg<br>TDZE <b>1324</b><br>Apt Elev <b>1326</b> |
|----------------------------------------|------------------------|-----------------------------------------------------|

RNAV (GPS) RWY 36

AUGUSTA MUNI (3AU)

RNP APCH - GPS.


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Baro-VNAV NA when using AAO altimeter setting. When local altimeter setting not received, use AAO altimeter setting and increase LPV DA to 1557 feet; increase LNAV/VNAV DA to 1607 feet. Increase all MDAs 40 feet and LNAV visibility Cat C ½ SM.

MISSED APPROACH: Climb to 4500 direct GOLUW and on track 347° to INDIC and hold.

|                           |                                       |                          |                                 |
|---------------------------|---------------------------------------|--------------------------|---------------------------------|
| AWOS-3P<br><b>124.175</b> | WICHITA APP CON<br><b>134.8 269.1</b> | CLNC DEL<br><b>125.0</b> | UNICOM<br><b>122.8 (CTAF) 0</b> |
|---------------------------|---------------------------------------|--------------------------|---------------------------------|

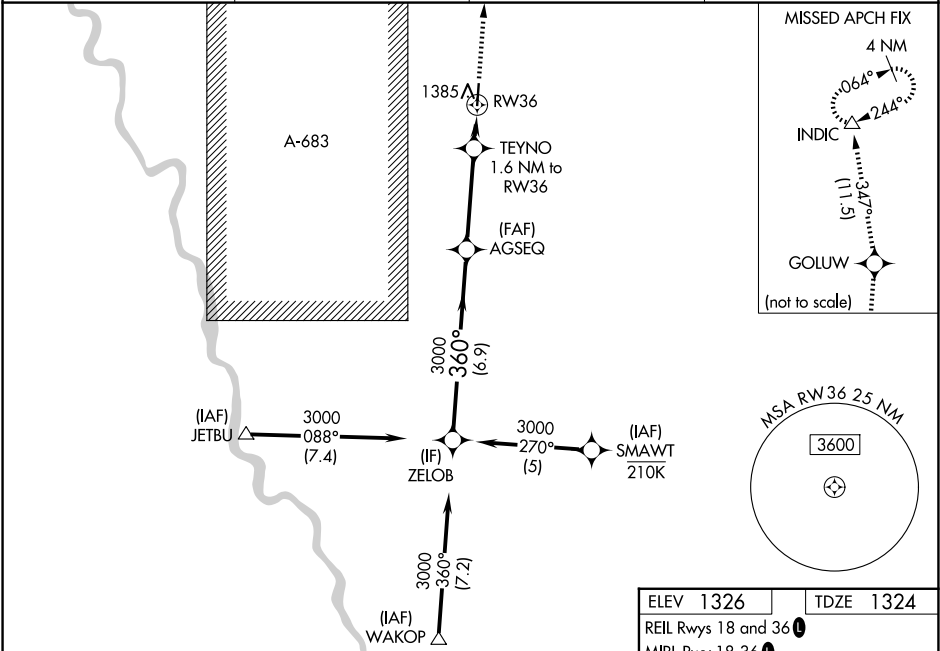

|                    |                       |                       |                         |                            |            |            |            |
|--------------------|-----------------------|-----------------------|-------------------------|----------------------------|------------|------------|------------|
| ZELOB              |                       | AGSEQ                 |                         | 4500<br>↑                  | GOLUW<br>✧ | tr<br>347° | INDIC<br>△ |
| 3000               |                       | 3000                  |                         | TEYNO<br>1.6 NM to<br>RW36 |            |            |            |
| GP 3.00°<br>TCH 40 |                       | 360°                  |                         | 1840                       |            | RW36       |            |
| 6.9 NM             |                       | 3.6 NM                |                         | 1.6 NM                     |            |            |            |
| CATEGORY           | A                     | B                     | C                       | D                          |            |            |            |
| LPV DA             | 1524-1 200 (200-1)    |                       |                         | NA                         |            |            |            |
| LNAV/<br>VNAV DA   | 1574-1 250 (300-1)    |                       |                         | NA                         |            |            |            |
| LNAV MDA           | 1700-1 376 (400-1)    |                       |                         | NA                         |            |            |            |
| CIRCLING           | 1800-1<br>474 (500-1) | 1820-1<br>494 (500-1) | 1820-1½<br>494 (500-1½) | NA                         |            |            |            |

