

WAAS CH 40324 W19A	APP CRS 193°	Rwy Idg TDZE 804 Apt Elev 817
--	------------------------	---

RNAV (GPS) RWY 19

DOUGLAS HUNTER FLD (1M5)

RNP APCH.



▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using Bowling Green altimeter setting. When local altimeter setting not received, use Bowling Green altimeter setting and increase LPV DA to 1144 and all visibilities ¼ mile; increase all LNAV/VNAV DA to 1184 and all visibilities ¼ mile; increase all MDA 100 feet and increase LNAV Cat C/D visibility ⅔ mile.

MISSED APPROACH: Climb to 3000 direct COLBU and hold.

AWOS-3PT 118.175	NASHVILLE APP CON 119.35 372.0	UNICOM 122.975 (CTAF) 0
----------------------------	--	-----------------------------------

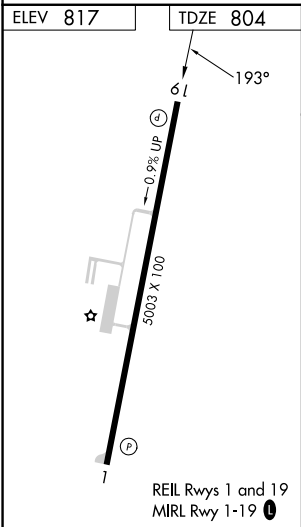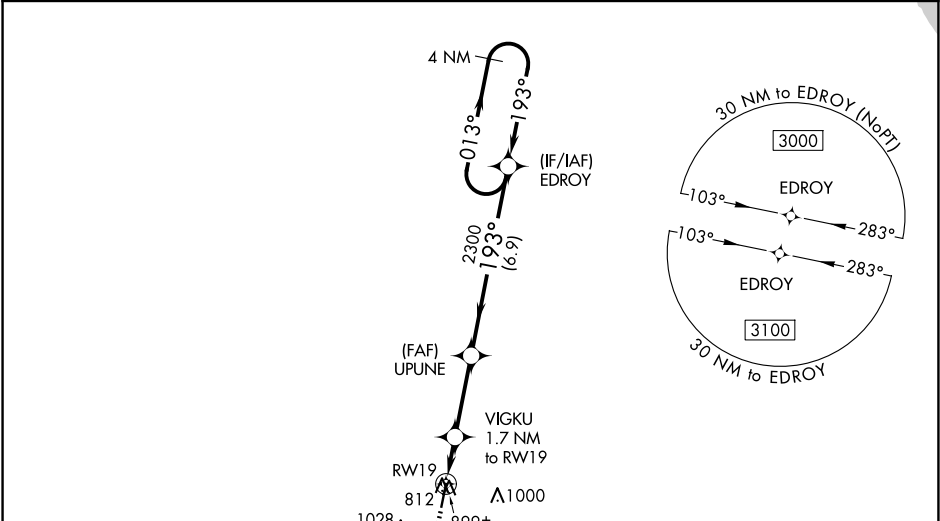

3000		COLBU	VGSi and RNAV glidepath not coincident.		4 NM
↑			VIGKU 1.7 NM to RW19		Holding Pattern
*LNAV only.			UPUNE 2300		
			RW19 1.2 NM to RW19		
			1340*		
			1.2 NM 0.5		
			3 NM 6.9 NM		
CATEGORY	A	B	C	D	
LPV DA	1054-1 250 (300-1)				
LNAV/VNAV DA	1094-1½ 290 (300-1½)				
LNAV MDA	1160-1 356 (400-1)				