
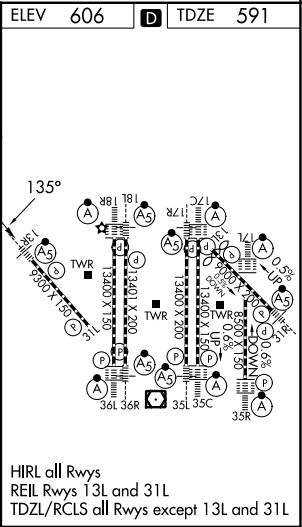


WAAS CH 72742 W13A	APP CRS 135°	Rwy Ldg TDZE 591 Apt Elev 606
--	------------------------	---

RNAV (GPS) Y RWY 13R

DALLAS-FORT WORTH INTL (DFW)

RNP APCH - GPS. ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8° C or above 54° C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 6000 and LNAV Cat C/D visibility to 1½ SM.		MALSR 	MISSED APPROACH: Climb to 1100 then climbing right turn to 3000 direct SLOTT and hold.
D-ATIS 123.775	LONE STAR APP CON 133.15 118.1	DFW TOWER 126.55 127.5 (E) 124.15 134.9 (W)	GND CON 121.65 121.8 (E) 121.85 (W)

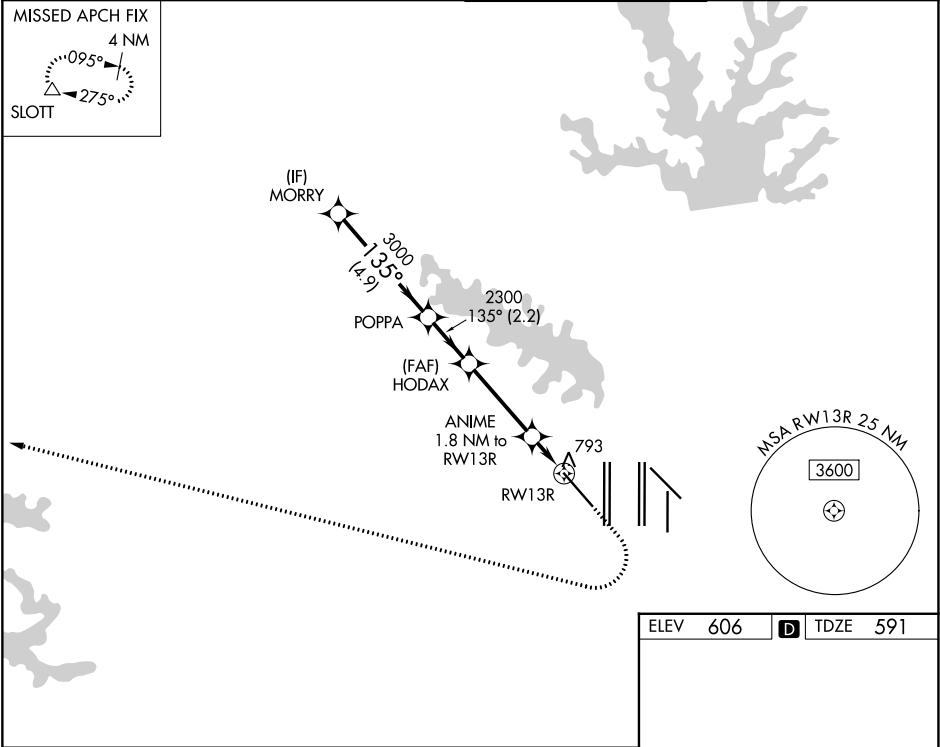

VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 71).				
MORRY POPPA HODAX ANIME RW13R				
3000 135° 3000 135° 2300 1200 1.8 NM to RW13R				
GP 3.00° TCH 55 4.9 NM 2.2 NM 3.4 NM 1.8 NM				
CATEGORY	A	B	C	D
LPV DA	791/18 200 (200-½)			
LNAV/VNAV DA	991/35 400 (400-¾)			
LNAV MDA	1080/24	489 (500-½)	1080/50	489 (500-1)