
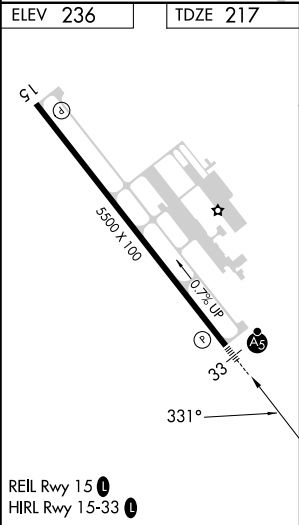


WAAS CH 56221 W33A	APP CRS 331°	Rwy Ldg TDZE 217 Apt Elev 236
--	------------------------	---

RNAV (GPS) RWY 33

RICHMOND EXEC/CHESTERFIELD COUNTY (F'CI)

RNP APCH - GPS.			MALSR 	MISSED APPROACH: Climb to 3000 direct DOCEV and hold.
▼ ▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Baro-VNAV and VDP NA when using RIC altimeter setting. For inop ALS, increase LPV all visibilities to ¾ SM, increase LNAV/VNAV all visibilities to 1 ¾, and increase LNAV visibility Cats C/D to 1 ¾ SM. When local altimeter setting not received, use RIC altimeter setting and increase LPV DA to 547 feet; increase LNAV/VNAV DA to 757 feet, increase all MDAs 40 feet and LNAV visibility Cat C/D ½ SM, and Circling visibility Cat C/D ¼ SM.				
AWOS-3PT 128.625	POTOMAC APP CON 126.75 307.2	CLNC DEL 124.6	UNICOM 123.05 (CTAF) 0	

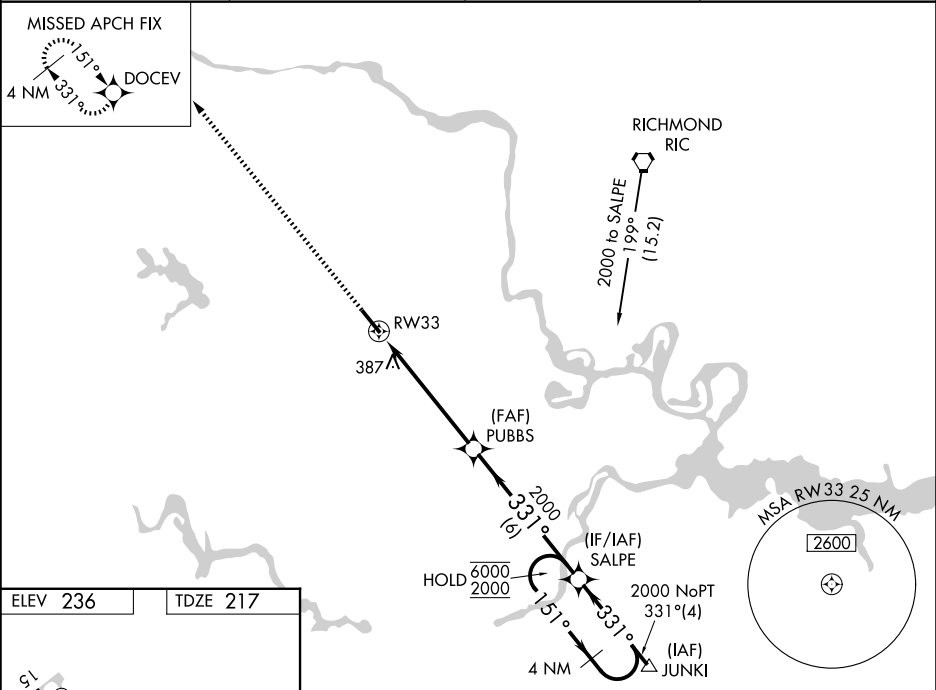

3000 DOCEV		PUBBS 2000		SALPE		4 NM Holding Pattern	
1.5 NM to RW33		RW33		1.5		3.9 NM	
1.5		3.9 NM		6 NM		GP 3.00° TCH 49	
CATEGORY		A		B		C	
LPV DA		510-1½		293 (300-½)			
LNAV/VNAV DA		720-1		503 (500-1)			
LNAV MDA		720-½ 503 (500-½)		720-1 503 (500-1)			
CIRCLING		720-1 484 (500-1)		820-1 584 (600-1)		820-1½ 584 (600-1½)	
						1020-2½ 784 (800-2½)	