

WAAS CH 70407 W29A	APP CRS 291°	Rwy Ldg TDZE 127 Apt Elev 145	5480
--	------------------------	---	-------------

RNAV (GPS) RWY 29

SKAGIT RGNL (BVS)

RNP APCH.


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.
Baro-VNAV and VDP NA when using Friday Harbor altimeter setting. When local altimeter setting not received use Friday Harbor altimeter setting; increase LPV DA to 438 feet, LNAV/VNAV DA to 536 feet and all Cats visibility ¼ SM; increase all MDA 60 feet.

MISSED APPROACH: Climb to 4000 direct SOCLO and hold, continue climb-in-hold to 4000.

AWOS-3 121.125	WHIDBEY APP CON 120.7 270.8	UNICOM 123.075 (CTAF) 1
--------------------------	---------------------------------------	-----------------------------------

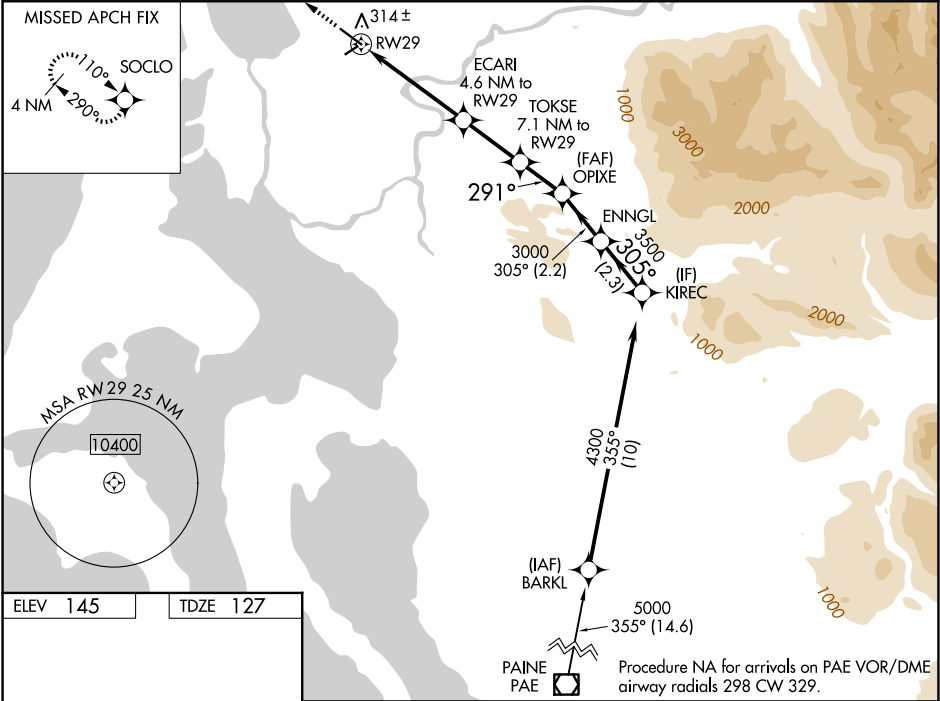

4000		SOCLO	
*LNAV only		*1.4 NM to RW29	
ECARI 4.6 NM to RW29		TOKSE 7.1 NM to RW29	
OPIXE (FAF)		ENNGL 3000	
KIREC (IF)		4300	
GP 3.00°		TCH 42	
CATEGORY	A	B	C
LPV DA	377-7⁄8		250 (300-7⁄8)
LNAV/VNAV DA	475-1¼		348 (400-1¼)
LNAV MDA	580-1	453 (500-1)	580-1⅓ 453 (500-1⅓)