

WAAS CH 53447 W35A	APP CRS 349°	Rwy Ldg 4200 TDZE 1047 Apt Elev 1047
--	------------------------	---

RNAV (GPS) RWY 35

DECATUR MUNI (LUD)

RNP APCH - GPS.



▼

▲

Rwy 35 helicopter: visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using FTW altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use FTW altimeter setting and increase LPV DA to 1408 feet; increase LNAV/VNAV DA to 1661 feet and all visibilities ¾ SM; increase all MDAs 120 feet.

MISSED APPROACH:
Climb to 1700 then climbing left turn to 3000 direct RALAE and hold.

AWOS-3 118.225	LONE STAR APP CON 118.1 306.95	UNICOM 123.075 (CTAF) 0
--------------------------	--	-----------------------------------

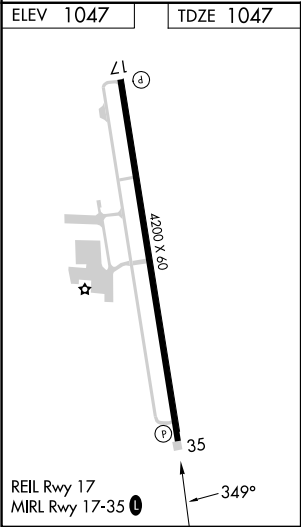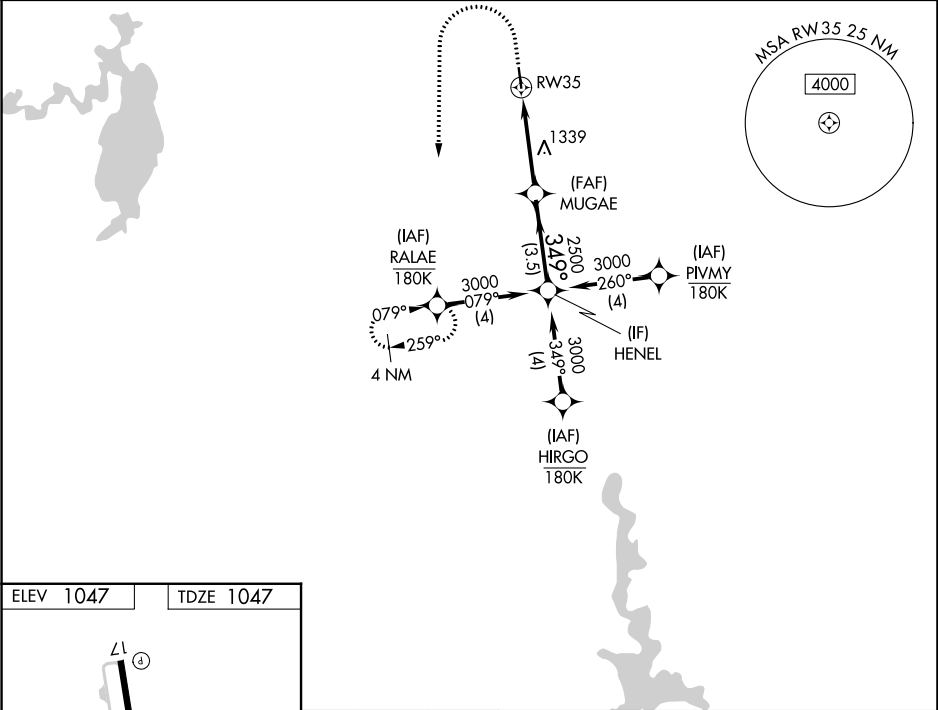

1700

3000

RALAE

↑

↖

✦

1.4 NM to RW35

2500

3000

GP 3.50°
TCH 40

1.4 NM

2.5 NM

3.5 NM

MUGAE

HENEL

349°

2500

RW35

CATEGORY	A	B	C	D
LPV DA	1297-1	250 (300-1)	NA	
LNAV/VNAV DA	1550-1½	503 (600-1½)	NA	
LNAV MDA	1600-1	553 (600-1)	NA	
CIRCLING	1600-1	553 (600-1)	NA	