

LOC/DME	I-EYK	APP CRS	Rwy Ldg
111.7		048°	5500
Chan 54			TDZE 18
			Apt Elev 19


ILS or LOC RWY 5
CHESAPEAKE RGNL (CPK)

⚠ When local altimeter setting not received, use ORF altimeter setting and increase DA to 256 feet; increase all MDAs 40 feet and CEKAD fix minimums S-LOC 5 visibility Cats C and D 1½ SM. For inop ALS, increase S-LOC 5 Cats C and D visibility to 1¾ SM.


MALSR

MISSED APPROACH: Climb to 500 then climbing left turn to 2000 on heading 190° and ORF VORTAC R-216 to NALDE INT/I-EYK 12.3 DME and hold.


AWOS-3 123.675	NORFOLK APP CON 118.9 353.7	GCO 135.075	UNICOM 123.075 (CTAF) 0
-------------------	--------------------------------	----------------	----------------------------

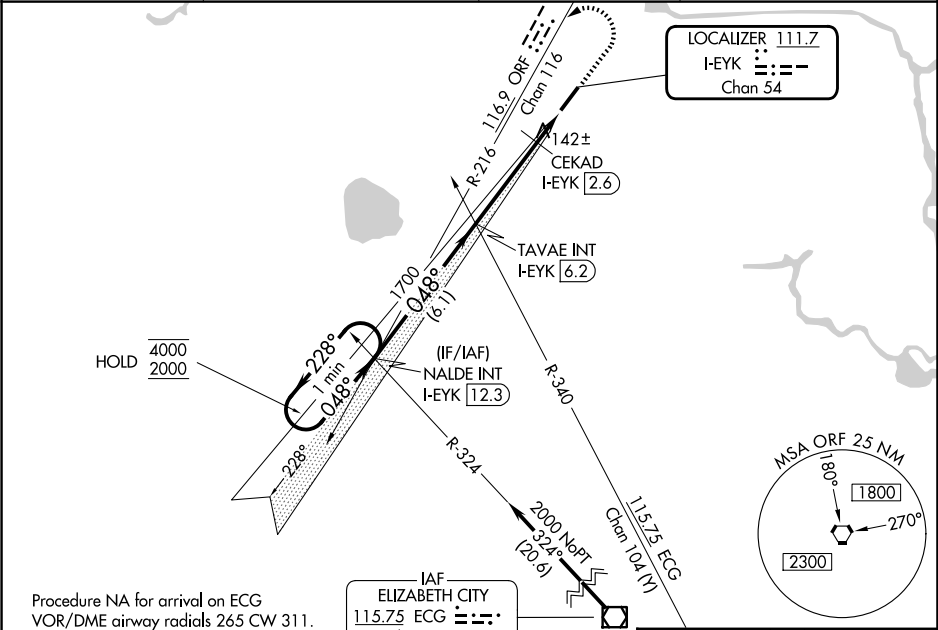

ELEV 19	TDZE 18
---------	---------

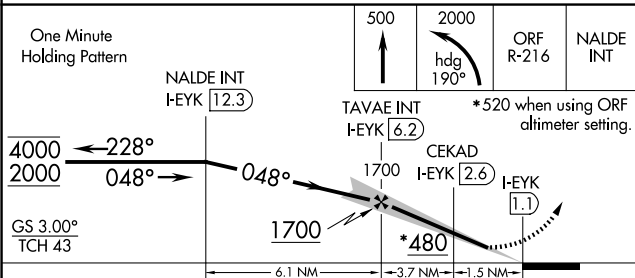

CATEGORY	A	B	C	D
S-ILS 5	218-½ 200 (200-½)			
S-LOC 5	480-½	462 (500-½)	480-1	462 (500-1)
CIRCLING	480-1	461 (500-1)	520-1½ 501 (600-1½)	580-2 561 (600-2)
CEKAD FIX MINIMUMS				
S-LOC 5	400-½	382 (400-½)	400-¾	382 (400-¾)
CIRCLING	460-1 441 (500-1)	480-1 461 (500-1)	520-1½ 501 (600-1½)	580-2 561 (600-2)

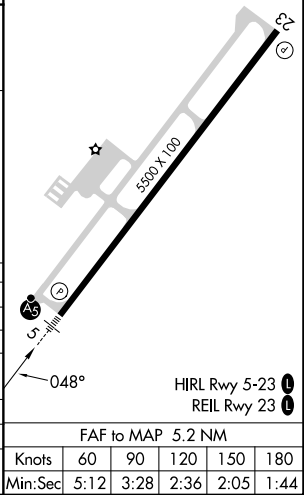

NE-3, 03 SEP 2026 to 01 OCT 2026

NE-3, 03 SEP 2026 to 01 OCT 2026