

WAAS CH 56334 W15A	APP CRS 154°	Rwy Ldg TDZE Apt Elev	4200 1378 1379
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 15

EL DORADO/CAPT JACK THOMAS MEML (EQA)


RNP APCH-GPS.

NA

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Rwy 15 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Colonel James Jabara altimeter setting and increase all DA 51 feet and all MDA 60 feet; increase LNAV/VNAV all Cals visibility ½ mile. Baro-VNAV and VDP NA when using Colonel James Jabara altimeter setting.

MISSED APPROACH:
Climb to 3100 direct BSHWD and hold.

AWOS-3P 120.875	WICHITA APP CON 134.8 269.1	UNICOM 122.8 (CTAF)
---------------------------	---------------------------------------	-------------------------------

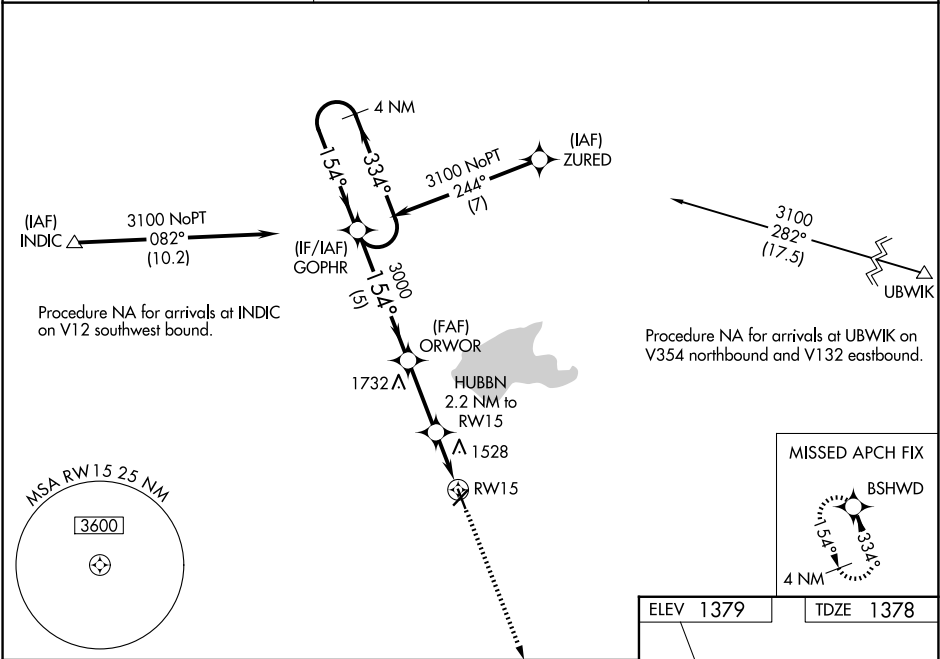

4 NM Holding Pattern

GOPHR

ORWOR

HUBBN 2.2 NM to RW15

3100

334°

154°

3000

154°

GP 3.00° TCH 40

5 NM

2.8 NM

1 NM

1.2 NM

3100

BSHWD

*LNAV only

*2100

*1.2 NM to RW15

RW15

CATEGORY	A	B	C	D
LPV DA	1628-1	250 (300-1)		NA
LNAV/VNAV DA	1843-1½	465 (500-1½)		NA
LNAV MDA	1780-1	402 (500-1)		NA
CIRCLING	1820-1 441 (500-1)	1960-1 581 (600-1)		NA

