

RNP APCH - GPS.


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Rwy 14 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 800 then climbing left turn to 3000 direct TRDLL and hold, continue climb-in-hold to 3000.

AWOS-3PT 118.975	TALLAHASSEE APP CON ★ 128.7 254.3	UNICOM 122.7 (CTAF) 0
---------------------	--------------------------------------	--------------------------

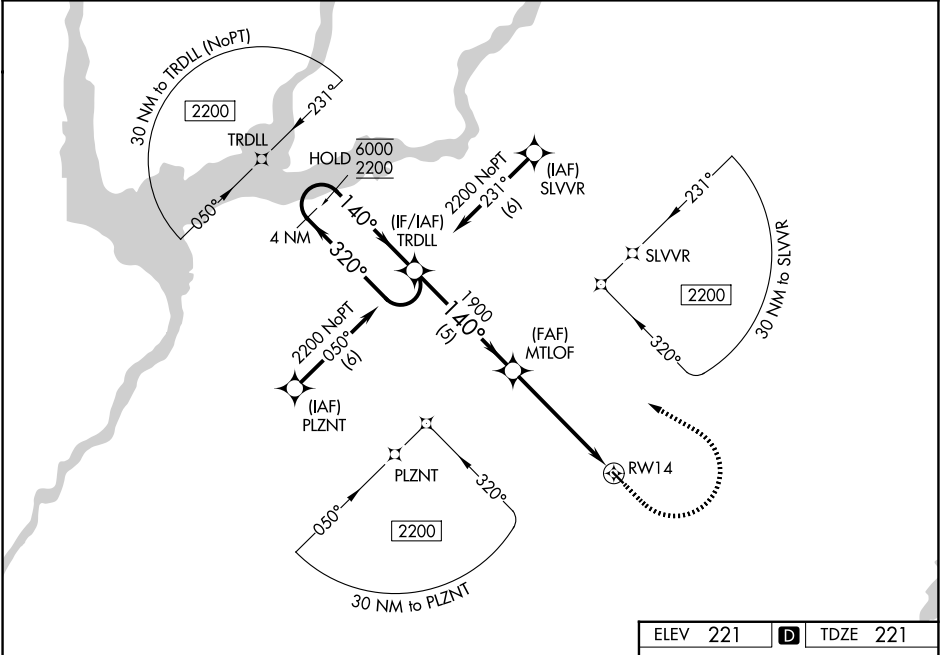

VGSi and RNAV glidepath not coincident (VGSi 3.00°/TCH 20).				
4 NM Holding Pattern 6000 ← 320° 2200 140° → GP 3.00° TCH 40 TRDLL MTLOF 1900 1.6 NM to RWY 14 RWY 14 5 NM 3.5 NM 1.6 NM				
CATEGORY	A	B	C	D
LPV DA	501-7½	280 (300-7½)		NA
LNAV/VNAV DA	793-1½	572 (600-1½)		NA
LNAV MDA	760-1	539 (600-1)	760-1½ 539 (600-1½)	NA
CIRCLING	780-1 559 (600-1)	800-1 579 (600-1)	960-2 739 (800-2)	NA

ELEV 221

D

TDZE 221

800

3000

TRDLL

140°

2871 X 25

0.63 WFO

31

MRL Rwy 14-32 0