

WAAS CH 93809 W35A	APP CRS 352°	Rwy Ldg 8000 TDZE 5515 Apt Elev 5515
--	------------------------	---

RNAV (GPS) RWY 35

COLORADO AIR AND SPACE PORT (CFO)

RNP APCH.


T For uncompensated Baro-VNAV systems, LNAV/VNAV NA
A below -25°C or above 46°C. For inop ALS, increase
 LNAV/VNAV all Cats visibility to 7/8 SM.

MAISR




MISSED APPROACH: Climb to 8000 direct CUDNI and on track 353° to PHLAT and hold.

ATIS 119.025	DENVER APP CON 128.25 371.95	SPACE PORT TOWER ★ 120.2 (CTAF) 0	GND CON 124.7	CLNC DEL 124.7	CLNC DEL 121.75 (When twr closed)	UNICOM 122.95
------------------------	--	---	-------------------------	--------------------------	--	-------------------------

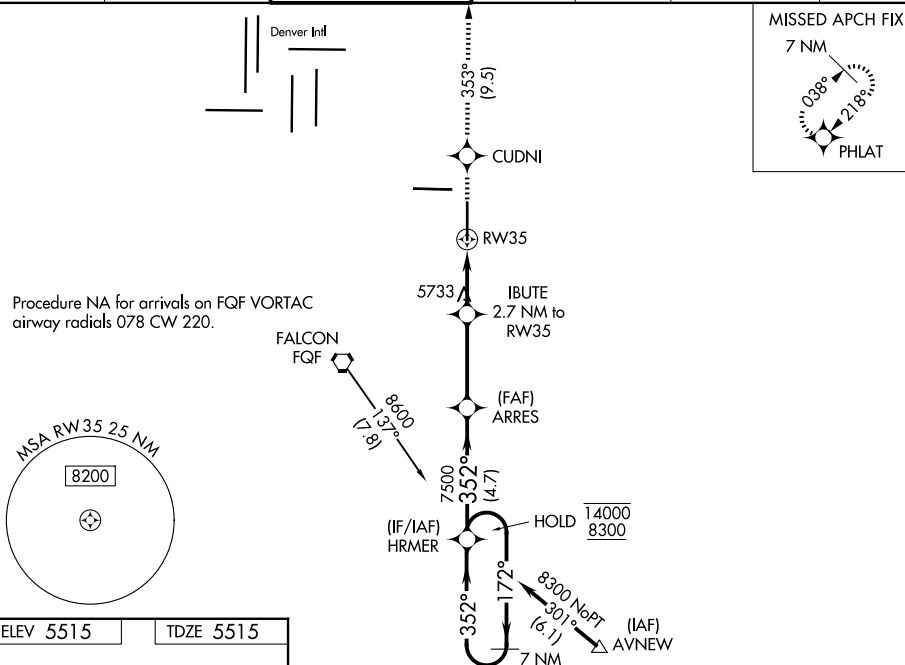

ELEV 5515		TDZE 5515
-----------	--	-----------



REIL Rwy 8 and 17 **L**
HIRL Rwy 8-26 **L**
MIRL Rwy 17-35 **L**

8000 ↑	CUDNI ✱	tr 353°	PHLAT ✱				
* LNAV only				IBUTE 2.7 NM to RW35 * 1.5 NM to RW35 6420* 7500 172° → 14000 ← 352° 7 NM Holding Pattern GP 3.00° TCH 54			
CATEGORY	A		B		C		D
LPV DA			5715-½ 200 (200-½)				
LNAV/ VNAV	DA		5783-½ 268 (300-½)				
LNAV MDA	6040-½ 525 (600-½)				6040-1 525 (600-1)		
CIRCLING	6040-1 525 (600-1)		6100-1½ 585 (600-1½)		6300-2½ 785 (800-2½)		