


LONE STAR DEP CON
 118.1 306.95
 ATIS
 126.925
 CLNC DEL
 128.725
 GND CON
 132.65 306.2
 ALLIANCE TOWER
 135.15 257.9

RADAR and DME required.

NOTE: BELCHER Transition: For aircraft inbound to the JAN, MLU, and SHV terminal areas only.
 NOTE: SOLDO Transition: ATC assigned.

TOP ALTITUDE:
 ASSIGNED BY ATC

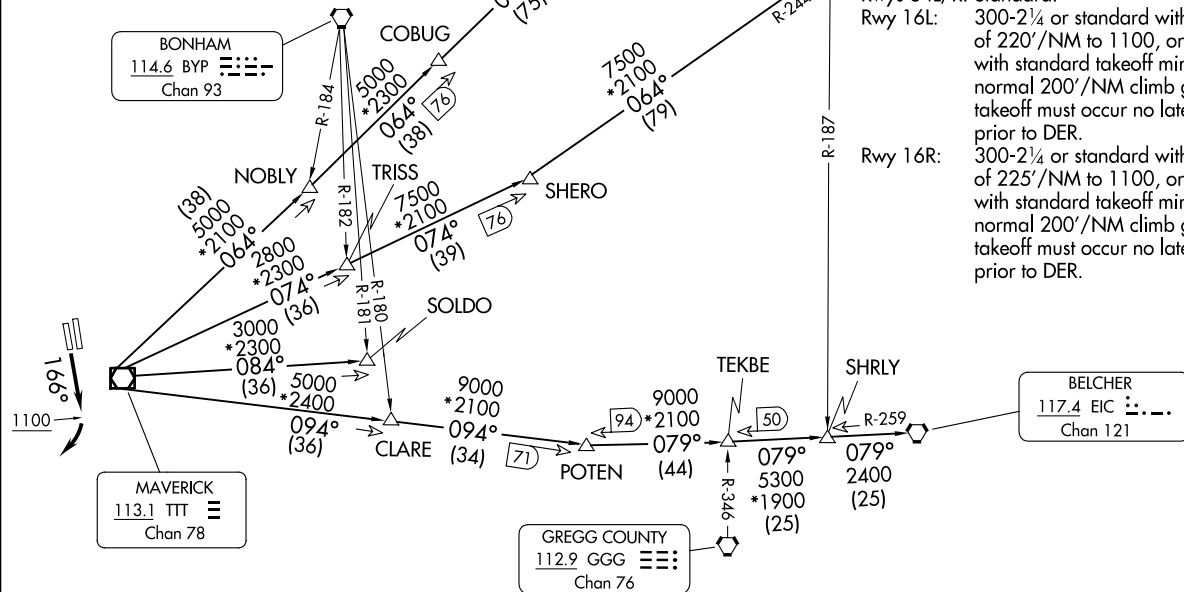

TAKEOFF MINIMUMS

Rwys 34L/R: Standard.

Rwy 16L:

300-2¼ or standard with minimum climb of 220'/NM to 1100, or alternatively, with standard takeoff minimums and a normal 200'/NM climb gradient, takeoff must occur no later than 1900' prior to DER.

Rwy 16R:

300-2¼ or standard with minimum climb of 225'/NM to 1100, or alternatively, with standard takeoff minimums and a normal 200'/NM climb gradient, takeoff must occur no later than 2000' prior to DER.

(CONTINUED ON FOLLOWING PAGE)

NOTE: Chart not to scale.



Fly assigned heading for RADAR vectors to appropriate route. Maintain ATC assigned altitude.

TEXARKANA TRANSITION (DALL4.TXK): From over TTT VOR/DME on TTT R-074 to SHERO, then on TXK R-244 to TXK VORTAC.