


WAAS CH 97540 W24A	APP CRS 238°	Rwy Ldg 3396 TDZE 575 Apt Elev 575
--	------------------------	---

RNAV (GPS) RWY 24
PAGELAND (PYG)

T Baro-VNAV NA. Rwy 24 helicopter visibility reduction below $\frac{3}{4}$ SM NA. DME/DME
A RNP-0.3 NA. Use Charlotte/Monroe Exec altimeter setting. When Charlotte/Monroe
NA Exec altimeter not received, use Charlotte/Douglas Intl altimeter setting and increase
LPV DA to 944 feet and all visibilities $\frac{1}{4}$ SM. Increase LNAV/VNAV DA to 986 feet
and all visibilities $\frac{1}{2}$ SM. Increase all MDA 60 feet.

MISSED APPROACH:
Climb to 2400 direct
WITHE and hold.

EQY ASOS	CHARLOTTE APP CON	(CTAF)
135.775	120.05 307.8	122.9

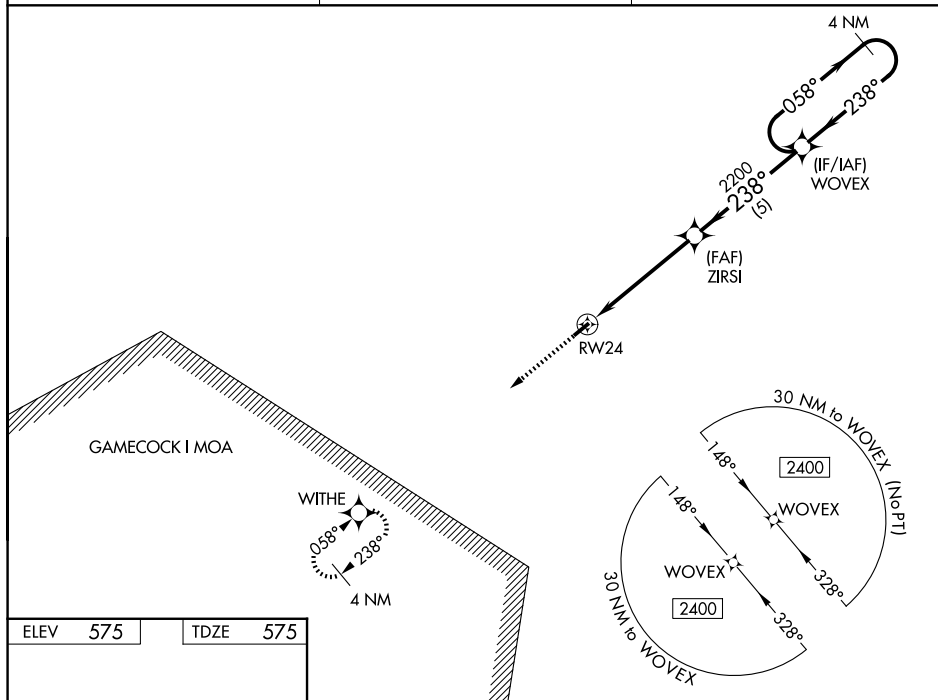

238°

3396 X 60

0.7% UP

238°

2400

↑

WITHE

4 NM Holding Pattern

ZIRSI

2200

238°

2200

058°

2400

238°

GP 3.00° TCH 40

5 NM

5 NM

CATEGORY	A	B	C	D
LPV DA	890-1	315 (400-1)	NA	
LNAV/VNAV	932-1¼	357 (400-1¼)	NA	
LNAV MDA	1040-1	465 (500-1)	NA	
CIRCLING	1100-1	525 (600-1)	NA	

MIRL Rwy 6-24

REIL Rwy 6 and 24

MIRL Rwy 6-24
REIL Rwy 6 and 24