

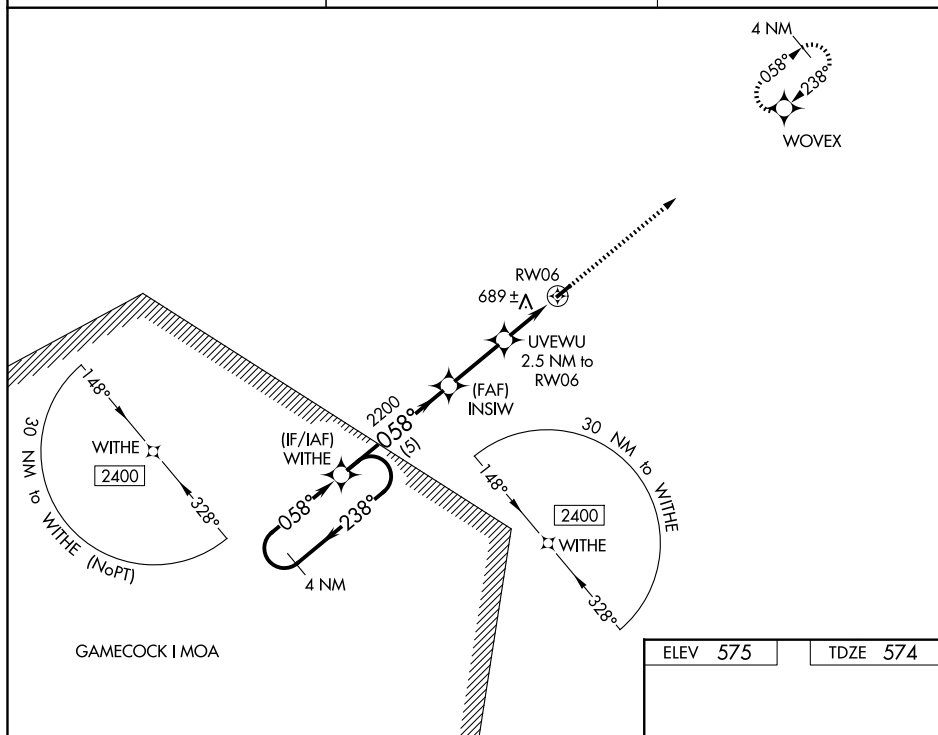
WAAS CH 56440 W06A	APP CRS 058°	Rwy Ldg TDZE Apt Elev	3396 574 575
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 6
PAGELAND (PYG)

NA Baro-VNAV NA. DME/DME RNP-0.3 NA. Use Charlotte/Monroe Exec altimeter setting. When Charlotte/Monroe Exec altimeter not received, use Charlotte/Douglas Intl altimeter setting and increase LPV DA to 943 feet and all visibilities $\frac{1}{8}$ SM. Increase LNAV/VNAV DA to 1139 feet and all visibilities $\frac{1}{8}$ SM. Increase all MDA 60 feet.

MISSED APPROACH:
Climb to 2400 direct
WOVEX and hold.

EQY ASOS 135.775	CHARLOTTE APP CON 120.05 307.8	(CTAF) 122.9
----------------------------	--	------------------------

[illegible]